



Project:

Item Number:

Quantity:

## INDUCTION RANGE: MIRAGE® PRO COUNTERTOP



Mirage® Pro 59500P Countertop Induction Range

### DESCRIPTION

The ultra-low profile, portable countertop induction range is designed for use in light to medium duty front-of-the-house cooking. Models 59500P and 59510P will plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction ranges are equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off
- Safety auto-shut-off function

### Agency Listings — 59500P



This device complies with Part 18 FCC Rules.

### Agency Listings — 59510P



This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult [www.vollrathco.com](http://www.vollrathco.com) for current product specifications.

### MODELS

59500P 1.8kW @ 120V (U.S. only)

59510P 1.4kW @ 120V (Canada only)

### FEATURES

- Next generation G4 engine with 4 IGBT switches for improved durability and temperature control
- Full two-year parts and labor warranty
- 100 power levels with optimum power output to a wide variety of induction-ready cookware
- 1-100 power levels or °F/°C temperature level controls
- Enhanced troubleshooting display
- 1-180 minute timer
- Stainless steel case and ceramic top
- Patent-pending low profile design and complete portability
- 59500P has a variable speed knob for fast temperature adjustment
- Ranges display HOT when unit is turned off, if the cooking surface is still hot
- Rubber feet to prevent slipping of appliance
- Unit comes with cord and plug and does not require hard wiring
- FCC listed

### IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- All models require adequate unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 3 inches (7.6 cm) at the rear and ½ inch (1.27 cm) at the bottom.

**WARRANTY:** All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals

Date

--	--



Setting the Standard™

[www.vollrathco.com](http://www.vollrathco.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573



Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462

## INDUCTION RANGE: MIRAGE® PRO COUNTERTOP

**MODELS** 59500P 1.8kW @ 120V (U.S only)  
 59510P 1.4 kW @ 120V (Canada only)

### DIMENSIONS

- ❑ Overall dimension: 14" wide x 15¼" deep x 3" high (35.56 cm x 38.74 cm x 7.62 cm)
- ❑ Shipping container dimension: 17¾" wide x 17" deep x 7¼" high (45.09 cm x 43.18cm x 18.42 cm)
- ❑ Weight of unit: 12.75 lbs (5.78 kg)
- ❑ Shipping weight: 15.70 lbs (7.12 kg)
- ❑ Dimensions shown in inches (cm)

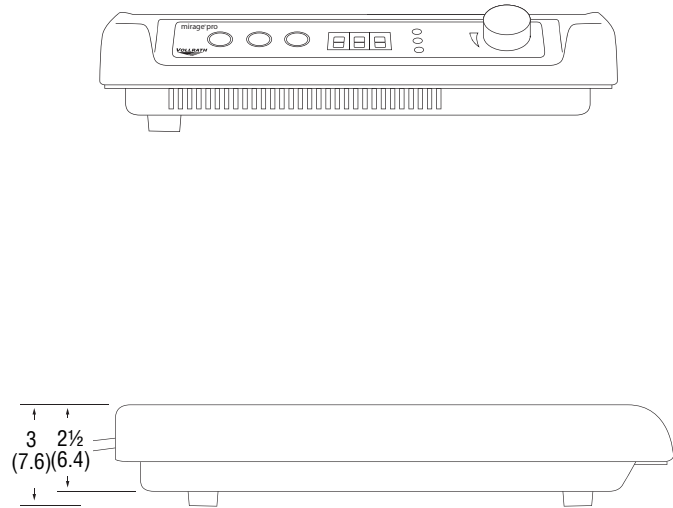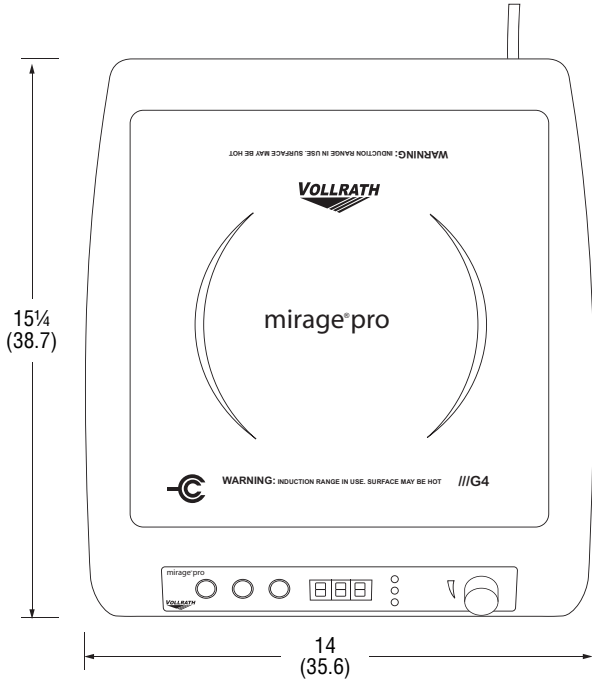


Unit shown with ½" (1.27 cm) feet.

### ELECTRICAL SPECIFICATIONS - 1 PHASE, 60 HZ

Model	kW Rating	Volts	Nominal Amps	NEMA Plug	Remarks
59500P	1.8 kW	120V AC	15	5-15P	
59510P	1.4 kW	120V AC	12	5-15P	

#### Receptacle



The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560  
 Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
 Technical Services Fax: 920.459.5462