



STAINLESS STEEL GLASS RINSERS

Rinses away any impurities that might be in the glass!

COUNTERTOP GLASS RINSER

FEATURES:

- Counter Top Mount
- Brushed Stainless Steel.
- 6" counter Mount.
- Mounts Easily In Underbar Equipment.
- Water Rinser & Glass Actuator By Pushing Down On Glass.
- Threaded Drain For 1/2" Drain Hose.

MATERIAL:

- 18 gauge stainless steel
- Stainless steel Water rinser and glass actuator construction.

MECHANICAL:

- 4-1/2" Glass Rinser Area
- Water Connection:** External -1/2" BSP (Standard Plumbing Connection)
- Drain Hose Connection:** 1/2" Flat Barb
- Drain:** Threaded Brass 3-1/2" x 5/8" x 18

Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____



Model #	Overall Size W x L x H	Approx. Weight	Approx. Cu. Ft.
SU-16	6-3/8" x 6-3/8" x 3/4"	7 lbs.	1

UNDERCOUNTER GLASS RINSER

FEATURES:

- Mounts Easily to Underside Of Wood Substrate
- Brushed Stainless Steel
- Retrofit any liquid dispense station
- Water Rinser And Glass Actuator By Pushing Down On Glass
- Threaded Drain For 1/2" Drain Hose

MATERIAL:

- 18 gauge stainless steel
- Stainless steel Water rinser and glass actuator construction.

MECHANICAL:

- 4-1/2" Glass Rinser Area
- Water Connection:** External -1/2" BSP (Standard Plumbing Connection)
- Drain Hose Connection:** 1/2" Flat Barb
- Drain:** Threaded Brass 3-1/2" x 5/8" x 18



Model #	O.A. Size W x L x H	Rinser Size W x L x H	Approx. Weight	Approx. Cu. Ft.
SU-16UM	6-3/8" x 11-3/8" x 1"	6-3/8" x 6-3/8" x 1"	8 lbs.	1



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

For Orders & Customer Service:
 Email: customer@advancetabco.com or Fax: 631-242-6900



For Smart Fabrication™ Quotes:
 Email: smartfab@advancetabco.com or Fax: 631-586-2933

DIMENSIONS and SPECIFICATIONS

TOL Overall: $\pm .500"$ Interior: $\pm .250"$



ALL DIMENSIONS ARE TYPICAL

SU-16 Countertop Glass Rinser

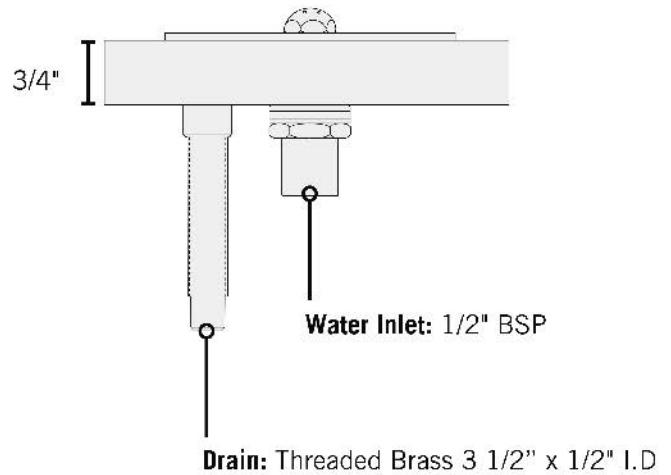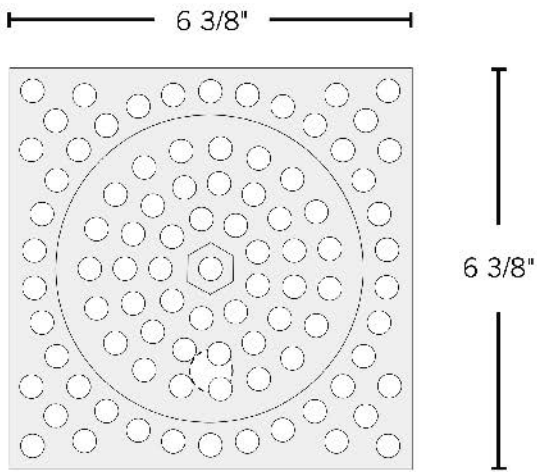

Requires Check Valve, Shut-Off and Pressure Regulator Set To 15 PSI (Supplied By Others).

SU-16UM Undercounter Glass Rinser

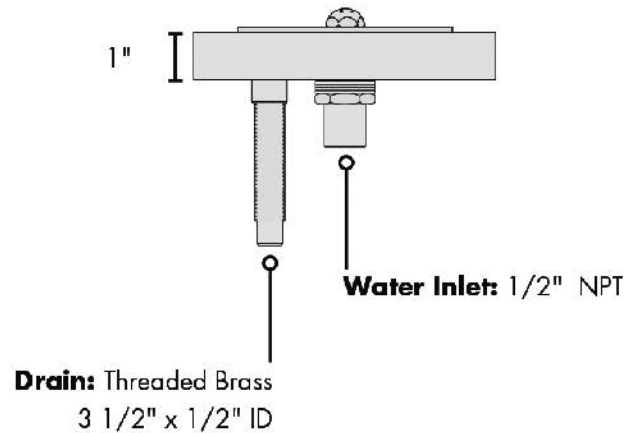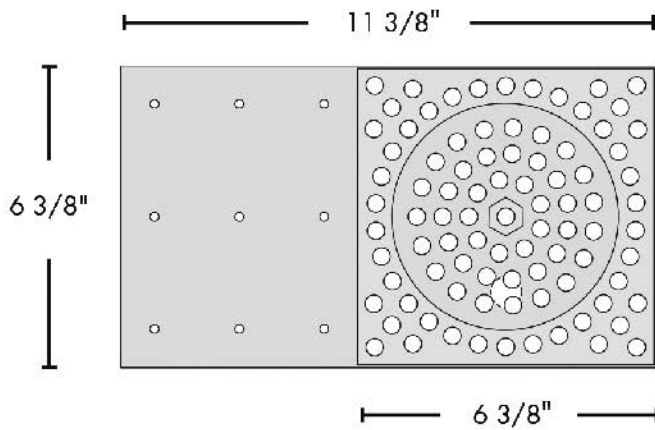

Requires Check Valve, Shut-Off and Pressure Regulator Set To 15 PSI (Supplied By Others).

