

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

MODELS:

BB48HC-1-GS-PT-B-27

BB48HC-1-GS-PT-S-27

BB BACK BAR EQUIPMENT

BB48HC Sliding Glass Door, Pass-Thru & Stainless Steel Top Hydrocarbon Series

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty



BB48HC-1-GS-B-PT-27

CABINET CONSTRUCTION

- Black or stainless steel exterior
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- Full electronic control
- 2" Stainless steel top
- Two (2) epoxy coated shelves per section, standard
- Magnetic door gaskets provide positive door sealing
- Self-closing doors
- Stay-open feature & lock standard
- LED lighting
- Field reversible doors

OPTIONS & ACCESSORIES

- ☐ 3"-6" casters or 6" legs
- ☐ Wine model (40°-60° models)
- ☐ Wine racks
- Food rated models available
- Underbar models available
- Foot pedal door opener

REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- Balanced forced-air refrigeration system provides rapid chilling of product
- Automatic, non-electric evaporator
- Epoxy coated evaporator coil




















MODEL	BB48HC-1-GS-PT-B-27	BB48HC-1-GS-PT-S-27
EXTERNAL DIMENSIONAL DATA		
Width Overall	48"	48"
Depth Overall	25 1/2"	25 1/2"
Height Overall	36"	36"
Number of Doors	4	4
Door Opening (in)	17" x 26 1/4"	17" x 26 1/4"
Shelf Area (sq. in.)	307 3/64"	307 3/64"
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	13.6	13.6
Internal Width Overall (in)	36 1/4"	36 1/4"
Internal Depth Overall (in)	18"	18"
Internal Height Overall (in)	28"	28"
Number of Shelves	4	4
Number of Kegs	2	2
ELECTRICAL DATA		
Full Load Amperes 115/60/1	3	3
REFRIGERATION DATA		
Horsepower	1/3	1/3
Capacity (BTU/Hr)*	1942	1942
WEIGHT DATA		
Gross Weight (Crated lbs)	316 lbs	316 lbs
Height - Crated	43"	43"
Width - Crated	51"	51"
Depth - Crated	27"	27"

Bar Equipment-Sliding Glass Door Pass-Thru with Stainless Steel Top

Model: BB48HC-1-GS-PT-B-27, BB48HC-1-GS-PT-S-27

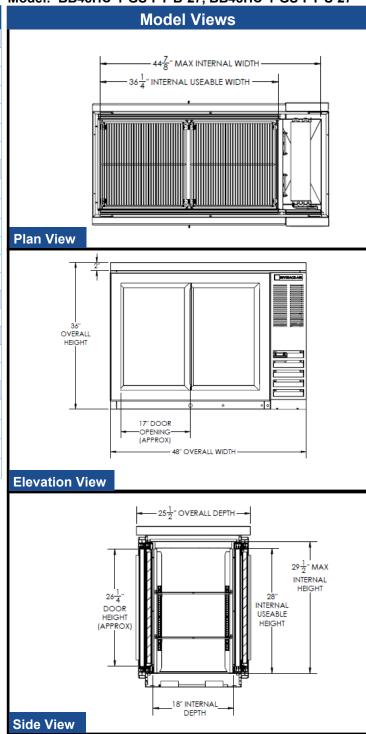

ELECTRICAL CONNECTION



















Units pre-wired at factory and include 8' long cord and plug set.

