




# PH1200, PH1215, PH1225 & PH1250 HEATED TRANSPORT CARTS

(bottom mounted heating system)  
Channel Slides

CARTER-HOFFMANN



FOOD SERVICE EQUIPMENT  
HEATED TRANSPORT CARTS

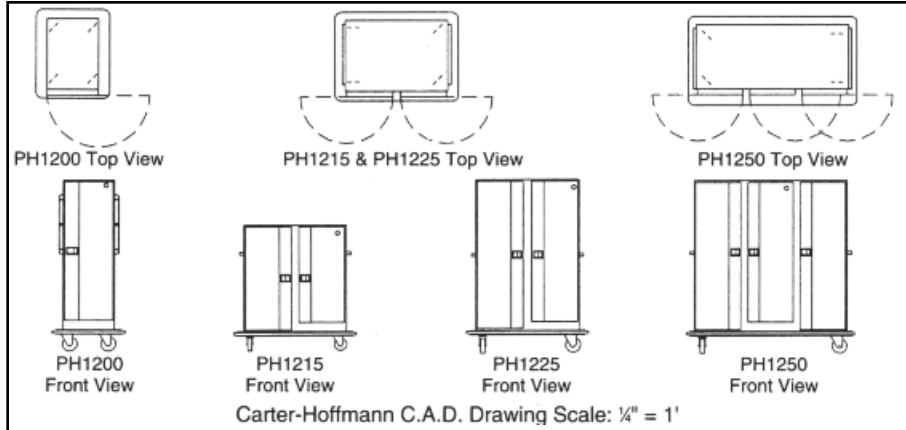

Model Number	Pan		Slide Pairs	Inside Working Height		Overall Dimensions						Caster Diameter		Shipping Weight	
	Capacity*			in	mm	Height		Depth		Width		in	mm	lbs	kgs
	12"x20"	12"x10"				in	mm	in	mm	in	mm				
<input type="checkbox"/> PH1200	16	32	16	46	1168	58	1473	28	711	24	610	5	127	280	127
<input type="checkbox"/> PH1215	21	41	21	30	762	42	1067	28	711	46 <sup>3</sup> / <sub>4</sub>	1187	5	127	325	147
<input type="checkbox"/> PH1225	33	66	33	46	1168	58	1473	28	711	46 <sup>3</sup> / <sub>4</sub>	1187	5	127	350	159
<input type="checkbox"/> PH1250	50	100	50	46	1168	42	1473	28	711	65 <sup>1</sup> / <sub>4</sub>	1658	5	127	450	204

\* Spacing is fixed on 2-3/4" centers. 2.5" deep pans.

**CONSTRUCTION...** Completely welded cabinet construction and top corners, with outer cabinet formed to base and welded. All seams turned in to eliminate raw edges.

**CABINET MATERIAL...** All stainless steel construction; 20 gauge polished exterior and 24 gauge interior.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters with 1"x1" 14 gauge stainless steel perimeter tube supports welded to bolsters.

**CASTERS...** 5" diameter, two rigid, two swivel polyurethane tread (all swivel on PH1200). Sealed roller bearing and double ball bearing swivel. Zerk grease fittings. Plated mounted and bolted to base in offset wheel-ahead pattern. Two casters fitted with brakes.

**BUMPER...** Non-marking gray vinyl bumper set in heavy-duty 3/16" thick extruded aluminum frame with reinforced corner cut-outs.

**INSULATION...** High density fiberglass, full 1" thick continuous wrap-around type insulation.

**DOOR(S)...** Double panel welded stainless steel with heavy-duty vinyl gasket. 20 gauge polished exterior and 24 gauge interior. Filled with 1" thick high density fiberglass insulation.

**HINGES...** Concealed, stainless steel hinge with 5/15" pin. 180 degree door swing.

**LATCH(ES)...** Flush mounted heavy-duty sliding latch for positive closing of door. Easy grip handle bolted to door.

**HANDLES...** Two heavy-duty aluminum push handles mounted to each end of cabinet. PH1200 handles mounted vertically. PH1215, PH1225 & PH1250 mounted horizontally.

**TRAY RACK ASSEMBLIES...** Removable stainless steel assemblies. 20 gauge channel slides spaced on 2 3/4" centers.

**THERMOMETER...** Dial type with remote sensing bulb and bulb protector.

**HEATING SYSTEM...** Bottom-mounted, all stainless steel construction. Removable without tools. Inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Full range thermostat, remote sensing bulb & power

indicating light. Lifts out for cleaning and service.

**ELECTRICAL CHARACTERISTICS...** PH1215, PH1225 & PH1250: operate on 120 volts, 60 cycle, single phase, 1650 watts, 13.7 amps. PH1200: operates on 120 volts, 60 cycle, single phase, 1530 watts, 12.8 amps. Ten foot 3 wire rubber cord with 3 prong grounding plug. NEMA 5-15P.

**PERFORMANCE...** Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) in approximately 25 minutes.

**ACCESSORIES/OPTIONS...**

- Transport latch with padlock hasp
- Stainless steel tubular handle(s)
- Locking door latch with key
- Tamper resistant fasteners
- Alternate caster sizes and types
- Rack & heater security hold downs
- Menu card colder
- Correctional package
- Alternate electrical configurations
- Reinforced cord strain relief grip
- Protective Lexan thermometer cover
- Removable canned heat unit
- Filler plate (no heating unit)
- Lift-up pull handle (n/a on PH1200)

# SPECIFICATIONS

Specifications subject to change through product improvement & innovation.



## CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981

Printed in U.S.A. F25 07/4  
Carter-Hoffmann is a trademark  
of Carter-Hoffmann LLC

# FEATURES & BENEFITS

## PH1200, PH1215, PH1225 & PH1250 HEATED TRANSPORT CARTS

*Since 1947, foodservice equipment that delivers!*

**FLUSH MOUNTED SLIDING DOOR LATCH...** Exclusively designed for transport applications. Door remains closed during transport. Flush design protects latch from damage.

**HEAVY-DUTY STAINLESS STEEL BASE FRAME...** 12 gauge caster bosters with 1"x1" stainless steel perimeter channel supports to withstand heavy loads and harsh transport conditions.



PH1225


**COMPLETELY WELDED TURNED-IN SEAM CONSTRUCTION...** Outer cabinet formed and welded to base. All seams turned in the eliminate raw edges. Adds rigidity to entire cabinet.

**NON-MARKING GRAY VINYL BUMPER...** Set in heavy-duty 3/16" thick extruded aluminum frame with reinforced corner cut-outs. Protects doorways, walls and cart from damage.

**POLYURETHANE TREAD CASTERS WITH SEALED ROLLER BEARING...**  
Long lasting, easy rolling for maximum load and minimum maintenance.



**HIGH PERFORMANCE HEATER...** Blower heating system with side mounted interior heat ducts for fast heat up, recovery and even heat distribution throughout cabinet. Removable without tools for easy maintenance and cleaning.



**OFFSET "WHEEL AHEAD" PATTERN...** Only one wheel can pass over uneven surfaces at a time for easy handling and steering.



**CHANNEL PAN SLIDES...** Heavy-duty stainless steel pan racks with fixed channel slides for full size and half size steam table pans. Fixed on 2-3/4" centers.

1551 McCormick Avenue, Mundelein, Illinois 60060  
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)

