

EXTRUDED SIDEWALL HALF-SIZE UTILITY RACK MODEL 282-1815

FEATURES AND BENEFITS:

- Durable half-size utility rack for preparation and processing operations. Top of rack has provision for a pan and cutting board; converts to personal work center.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Easy to clean; interlocking, extruded sidewalls hold 18" x 26" pans and plastic food boxes on 1-1/2" centers. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing. Eliminates potential of product damage.
- Heavy duty 3" swivel casters, two with brakes. Provides mobility when fully loaded.




282-1815



ACCESSORIES and OPTIONS (Available at extra cost):

- Cutting Board and Pan Assembly
- Pan Stop
- Corner Bumpers
- Vertical Corner Bumpers
- Perimeter Bumper

See page G-36 for accessory details.

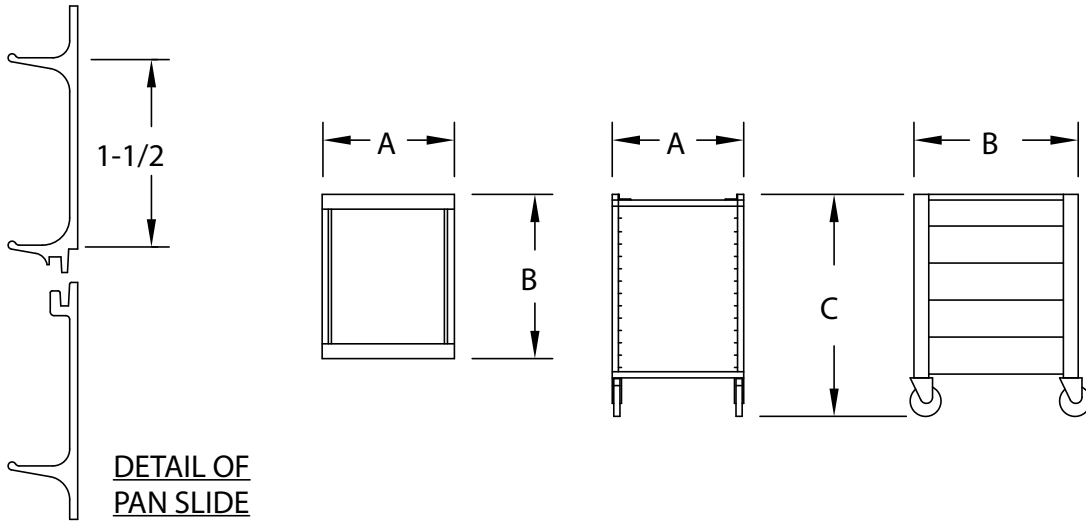

**DETAIL OF
PAN SLIDE**

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH*	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
282-1815	15	18 X 26	IN	21-15/16	26-5/8	30	18-1/8	25-1/2	22-5/16	LBS	37
		460 X 660	MM	560	680	765	460	650	570	KG	17

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded channels, 1 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Sides: Interlocking extruded 6" panels, smooth outer sides; riveted to posts.
- Casters: 3" dia., swivel, modulus tires, 1-1/4 wide, load cap. 240 lbs. each, temp. range -45°/+180°F. Bearings are sealed and permanently lubricated. Two casters equipped with brakes.

PAN SLIDES:

- Extruded interlocking side walls act as pan slides on 1-1/2" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Half-Size Utility Rack Model 282-1815. Extruded aluminum welded construction. Interlocking extruded sides for (15) 18" x 26" pans on 1-1/2" centers. 3" swivel modulus casters, permanently lubricated sealed ball bearings. Load capacity 240 lbs. each, temperature -45° to +180°F. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____. NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2016 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.