

□ 11814E

□ 11814EF

# 1814E High Production, Oil-Conserving Electric Fryers

ı	Project
	ltem
	Quantity
	CSI Section 11400
	Approval
	Date —
	Date

	To T	11011
		-
-	-	-

Model Shown: 21814E with optional filtration



Model Shown: 11814E/RE17/11814E

# Standard Features

☐ 21814EF

☐ 31814EF

### 11814E/ 21814E/31814E/41814E

- 18" x 14" x 4-1/4" (45.7 x 35.6 x 10.8 cm) frying area per frypot uses 60 lbs. (30 liters) of oil and cooks three twin baskets of food at the same
- 17 kw input per frypot meets high production demands of a varied menu
- SMART4U® Lane controller has programmable cook buttons and features that make it easy to produce consistent great-tasting food.
- · Proprietary, self-standing, swing-up, flat-bar low-watt density long-life heating elements
- High energy efficiency and production capacity
- · Robust, RTD 1° compensating temperature probe
- Stainless steel frypot, door and cabinet sides
- Sturdy stainless steel basket hangers
- Three twin baskets per frypot
- 21814EF, 31814EF, 41814EF come standard with filtration and casters

# 11814E/RE17/11814E Has Standard Features of the Batteries Above Plus:

 An RE17 frypot that meets ENERGY STAR® guidelines with a 50-lb (25 liter) oil capacity, 17 kw input, and a 14" x 14" x 3-1/2" (35.6 x 35.6 x 8.9 cm) cooking area

• The RE17 frypot has a 2-Lane controller with all the features of the 3-Lane controller except that it manages the cooking of 2-twin baskets instead of three

☐ 11814E/RE17/11814E (with filter)

Two additional twin baskets

☐ 41814EF

# Options & Accessories

- ☐ Built-in filter for 11814E model Bulk oil (dispose and fresh fill) on batteries with built-in filtration
- External oil discharge (dispose only) available on built-in filter batteries of two or more frypots. Must specify front or rear connection. Front connection comes with 5' washdown hose (precludes bulk rear oil discharge) Digital, CM3.5 and SMART4U 3000
- controller
- Frypot covers ☐ Chicken/Fish plate
- ☐ Chicken basket
- ☐ Full basket Dual basket
- □ Quad basket
- $\square$  Casters (included on filter models)
- $\square$  Crisper tray
- Splash shield

# Specifications

Designed to handle high production demands of a varied menu while conserving space, energy, and oil.

The 11814E large capacity electric fryers have 60-lb. (30 liter) frypot oil capacity with an 18" x 14" x 4-1/4" (45.7 x 35.6 x 10.8 cm) cooking area. The ability to cook three baskets of food in an 18" x 14" x 4-1/4" cooking area allows for footprint, oil use and energy use reductions over standard 50-lb fryers. Two 11814E fryers can do the work of three standard fryers and two 11814E fryers combined with an RE17 fryer allows three fryers to do the work of four standard fryers. The savings add up quickly using 15-20% less oil, upwards of 33% less energy, and 10-15% less space.

Frymaster's proprietary self-standing, swing-up, flatbar, low-watt density, long-life heating elements and controls ensure industry-leading energy efficiency.

The robust RTD, 1° Compensating temperature probe, mounted on the elements, ensures precise temperature readings. The thermostat system

minimizes temperature overshoot maximizing oil life. It also compensates for variations in cooking loads, consistently producing high-quality food.

The fryers' SMART4U Lane controller has programmable cook buttons and features that make it easy to produce consistent, great-tasting food. The Analog\*, Digital, CM3.5, and SMART4U® 3000 controller options are also available.

The bottom of the frypots are sloped toward the front and are equipped with a large drain line so crew members can quickly flush out sediment and remove old oil.

The built-in filtration models make it easy to preserve oil life and maintain food quality. The built-in filter utilizes an 8 GPM (30 LPM pump and is equipped with a 3" (7.61 cm) drain line, making filtering fast, safe and easy. The "built-in" feature puts filtration within the fryer battery where it's most convenient to use.

\*Not available for CE.





All 1814E models meet ENERGY STAR® guidelines and are part of the Manitowoc EnerLogic™ program.








8700 Line Avenue Shreveport, LA 71106-6800 USA

Tel: 318-865-1711 Tel: 1-800-221-4583 Fax: 318-868-5987 E-mail: info@frvmaster.com www.frymaster.com

Bulletin No. 818-0690 Revised 1/20/16





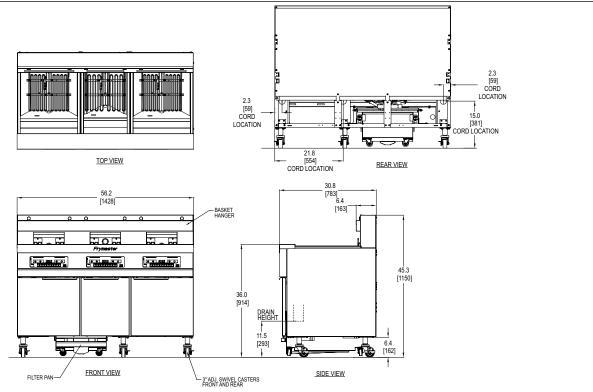

#### IMENSIONS

DIMENSIONS											
MODEL NO.	OIL CAPACITY		OVERAL	L SIZE (cm)	DRAIN HEIGHT	SHIPPING INFORMATION					
		WIDTH	DEPTH	HEIGHT		WEIGHT	CLASS	CU. FT.		DIMENSIONS (	:m)
11814E/ 11814EF	60 lbs. (30 liters)	20" (50.8)	30-7/8 (78.4)	45-3/8" (114.9 cm)	14-5/8" (37.2 cm)	w/o filter 255 lbs. (116 kg) w/filter 390 lbs. (177 kg)	85	39.7	<b>W</b> 29" (73.7)	<b>D</b> 43" (109)	<b>H</b> 55" (139.7)
21814EF	60 lbs. (30 liters) each frypot	40" (101.6)	30-7/8 (78.4)	45-3/8" (114.9 cm)	11-1/2" (29.2 cm)	w/filter 645 lbs. (293 kg)	77.5	68.3	53" (134.6)	42" (106.7)	53" (134.6)
31814EF	60 lbs. (30 liters) each frypot	60" (152.4)	30-7/8 (78.4)	45-3/8" (114.9 cm)	11-1/2" (29.2 cm)	w/filter 900 lbs. (408 kg)	77.5	88.2	66" (167.6)	42" (106.7)	55" (139.7)
41814EF	60 lbs. (30 liters) each frypot	80" (203.2)	30-7/8 (78.4)	45-3/8" (114.9 cm)	11-1/2" (29.2 cm)	w/filter 1,155 lbs. (524 kg)	77.5	111	83" (209.5)	42" (106.7)	55" (139.7)
11814E/ RE17/11814E (w/filter)	11814E 60 lbs. (30 liters) each frypot RE17 50 lbs. (25 liters)	56-1/4" (142.8 cm)	30-7/8 (78.4)	45-3/8" (114.9 cm)	11-1/2" (29.2 cm)	w/filter 907 lbs. (411 kg)	77.5	88.2	66" (167.6)	42" (106.7)	55" (139.7)

# POWER REQUIREMENTS

DACIC DOMESTIC	kw	ELEMENTS	/FRYPOT	CONTROLS/ FRYPOT	FILTER	
BASIC DOMESTIC		VOLTAGE	3 PHASE*	FRIFOI		
11814E	17	208V 240V 480V	48 A 41 A 21 A	1 A 1 A 120 V 1 A	5 A 4 A 120V 8 A	
RE17	17		48 A 41 A 21 A	1 A 1 A 120V 1 A	5 A 4 A 120V 8 A	
BASIC EXPORT						
11814E	17	220V/380V 230V/400V 240V/415V	26 A 25 A 24 A	1 A 1 A 1 A	4 A 4 A 4 A	
RE17	17	220V/380V 230V/400V 240V/415V	26 A 25 A 24 A	1 A 1 A 1 A	4 A 4 A 4 A	

<sup>\*3</sup> PH/3 Wire/Plus Ground Wire

### NOTES

- Cord is provided with exception of items in red (see chart on left).
- Plug is optional on all units shipped with a cord. Canada is an exception; and cords, where available, must have a plug attached.
- All 480 volt models are provided with a separate 120 volt cord and plug for filter pump and/or controller.

### **CLEARANCE INFORMATION**

A minimum of 24" (61 cm) should be provided at the front of the unit for servicing and proper operation, 6" (15.2 cm) between the sides and rear of the fryer to any combustible material.

## HOW TO SPECIFY

The following descriptions will assist with ordering the features desired for this equipment.  $\label{eq:final_problem}$ 

equipment. \*\*11814E\*\*\*

One Frymaster 60-lb (30 liter) oil capacity electric fryer with 18" x 14" x 4-1/4" (45.7 x 35.6 x 10.8 cm) cooking area and

SMART4U lane controller. 11814E/RE17/11814E Two Frymaster 60-lb (30 lit

Two Frymaster 60-lb (30 liter) oil capacity electric fryers with  $18" \times 14" \times 4-1/4"$  ( $45.7 \times 35.6 \times 10.8$  cm)) cooking areas, one Frymaster 50-lb oil capacity electric fryer with  $14" \times 14" \times 3-1/2'$  ( $35.6 \times 35.6 \times 8.9$  cm) cooking area, SMART4U lane controllers

and built-in filtration.

\*\*Indicates number of frypots (1, 2, 3 or 4)
\*\*\*Add built-in filtration for filter models.

8700 Line Avenue Shreveport, LA 71106-6800 USA Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987
E-mail: info@frymaster.com

# www.frymaster.com

Bulletin No. 818-0690 Revised 1/20/16 Litho in U.S.A. ©Frymaster

