



Project:		AIA#
Item #:	Qty:	SIS#
Model #:		

Dry Waste Chutes

DWB-12, DWB-15L, DWB-15R, DWB-18

Standard Features

- All stainless steel construction
- Top lifts up in front for easy removal of trash receptacle
- Top lifts off completely for thorough cleaning
- Matches 30" high worksurface profile of adjacent equipment
- Designed to house the Rubbermaid[®] Slim Jim[™] trash receptacle
- Four different models to meet various installation requirements: two side mount, one-side mount or free standing




Conforms to ANSI/NSF STD 2

To view underbar installation instructions, please visit: http://www.glastender.com/PDF/F-750-165_Underbar_Installation_Instructions.pdf To view cleaning and care instructions, please visit: http://www.glastender.com/PDF/F-423-011_ss_clean_care.pdf

Specifications	Product Information
Legs • 1-5/8" diameter, 16 gauge stainless steel • Stainless steel bullet feet Materials • 20 gauge stainless steel	There are four different Dry Waste Chute models to meet vari- ous installation requirements. For all four models, the top lifts up for emptying the trash receptacle. The top also lifts off com- pletely for more thorough cleaning. The DWB-12 is designed for mounting between two adjacent pieces of Glastender underbar. The DWB-15L and DWB-15R include a left or right side and leg set, respectively, for mounting to just one piece of Glastender underbar. The DWB-18 is free standing. All models are designed to house a Rubbermaid [®] Slim Jim [™] trash receptacle, which is available from Glastender under part number 03000497

Glastender, Inc. • 5400 North Michigan Road 989.752.4275 • 800.748.0423 • Fa www.glastender.com	x 989.752.4444	Approval/Notes:
Specifications subject to change without notice. For current specifications please visit our website.		
Printed in USA	3.26	Rev. 11-09-15

Dry Waste Chutes

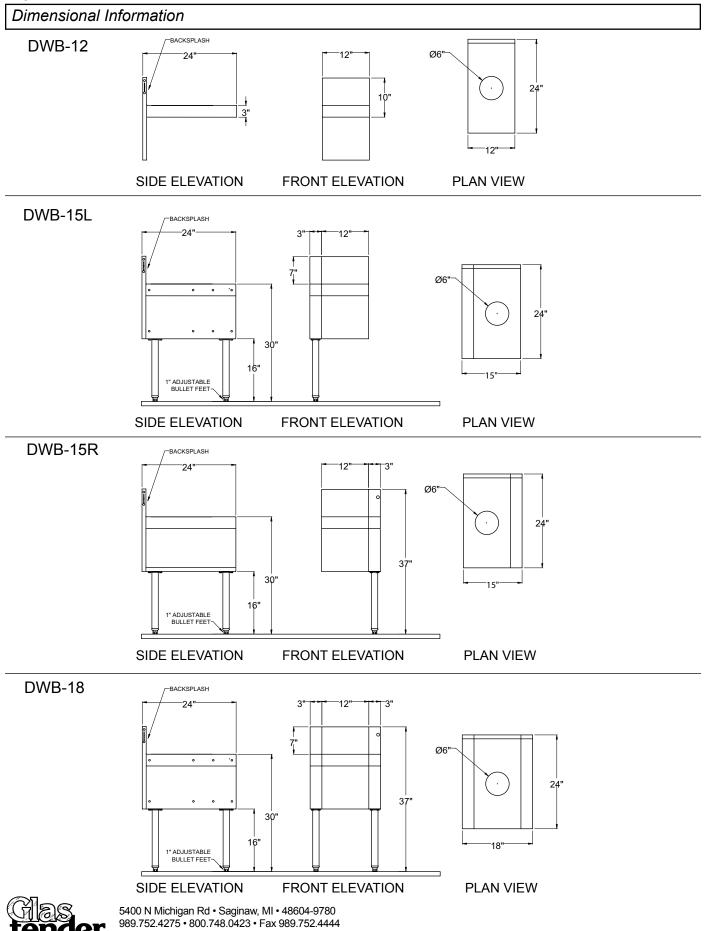

er www.glastender.com