



Project _____

Item # _____

Quantity _____

Heated Black Glass Shelves

Portables: HBG-2418, -3018, -3618, -4818, -6018, -7218

Built-Ins: HBGB-2418, -3018, -3618, -4818, -6018, -7218

HBGBH-2418, -3018, -3618, -4818, -6018, -7218

(HBGBH is an international model only)

Hatco Heated Black Glass Shelves have a heated ceramic glass top that creates uniform heat across the entire surface, and are made of approved foodsafe material. Ideal for use on pass-through areas, buffet lines, and as hors d'oeuvre displays.

Standard features

- Made of approved foodsafe material allowing placement of food product directly on the glass surface
- Thermostatically-controlled ceramic glass surface heated base
- Lighted On/Off rocker switch
- All units are equipped with an attractive trim mounting ring available in stainless steel (standard) or Designer Black.
- Portable models come with a 1829 mm (6') cord and plug
- Portable models offer an optional angled food stop which keeps product on the heat zone
- Portable models' surface temperature ranges from 100° to 195°F (38° to 90° C)
- Built-In Standard and High Watt models are recommended for use in metallic counters – for other surfaces, verify that the material is suitable for temperatures
 - Up to 200°F (93°C) for Standard Built-In*
 - Up to 257°F (125°C) for High Watt Built-In*
- Built-in Standard and High Watt models include control box with 3' (915 mm) conduit and 6' (1829 mm) cord and plug

* Hatco is not responsible for counter damage caused by heat from the warmer.



Options (available at time of purchase only)

Portable models (HBG)

Angled Food Stop

- 24" (610 mm)
- 30" (672 mm)
- 36" (914 mm)
- 48" (1219 mm)
- 60" (1524 mm)
- 72" (1829 mm)

- Designer Black Powdercoated Trim Ring - Stainless Steel is standard color (Non-standard colors are non-returnable)

Built-In models

- Designer Black color for Flush Mount Control Bezel Box - Stainless Steel is standard color (Non-standard colors are non-returnable)
- Designer Black Powdercoated Trim Ring - Stainless Steel is standard color (Non-standard colors are non-returnable)
- Unit without Trim Ring (HBGBH models only)
- Flush Mount Electronic Control Box with Lighted Power Switch – CE not available (HBGB models only)
- Flush Mount Thermostatic Control Box with Lighted Power Switch (HBGB models only)
- 36" (915 mm) conduit in lieu of standard 72" (1829 mm) used with Flush Mount Electronic Control Box (HBGBH models only)
- 72" (1829 mm) conduit in lieu of standard 36" (915 mm) used with Flush Mount Electronic Control Box (HBGB models only)
- 120" (3050 mm) conduit used with Flush Mount Electronic Control Box (in lieu of standard 36" (915 mm) for HBGB and 72" (1829 mm) for HBGBH)
- Built-In Heated Black Glass Shelf with Recessed Top (HBGB models only)



ANSI/NSF 4


HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Heated Black Glass Shelves

HBG-2418, -3018, -3618, -4818, -6018, -7218, HBGB-2418, -3018, -3618, -4818, -6018, -7218
 HBGBH-2418, -3018, -3618, -4818, -6018, -7218 (HBGBH is an international model only)

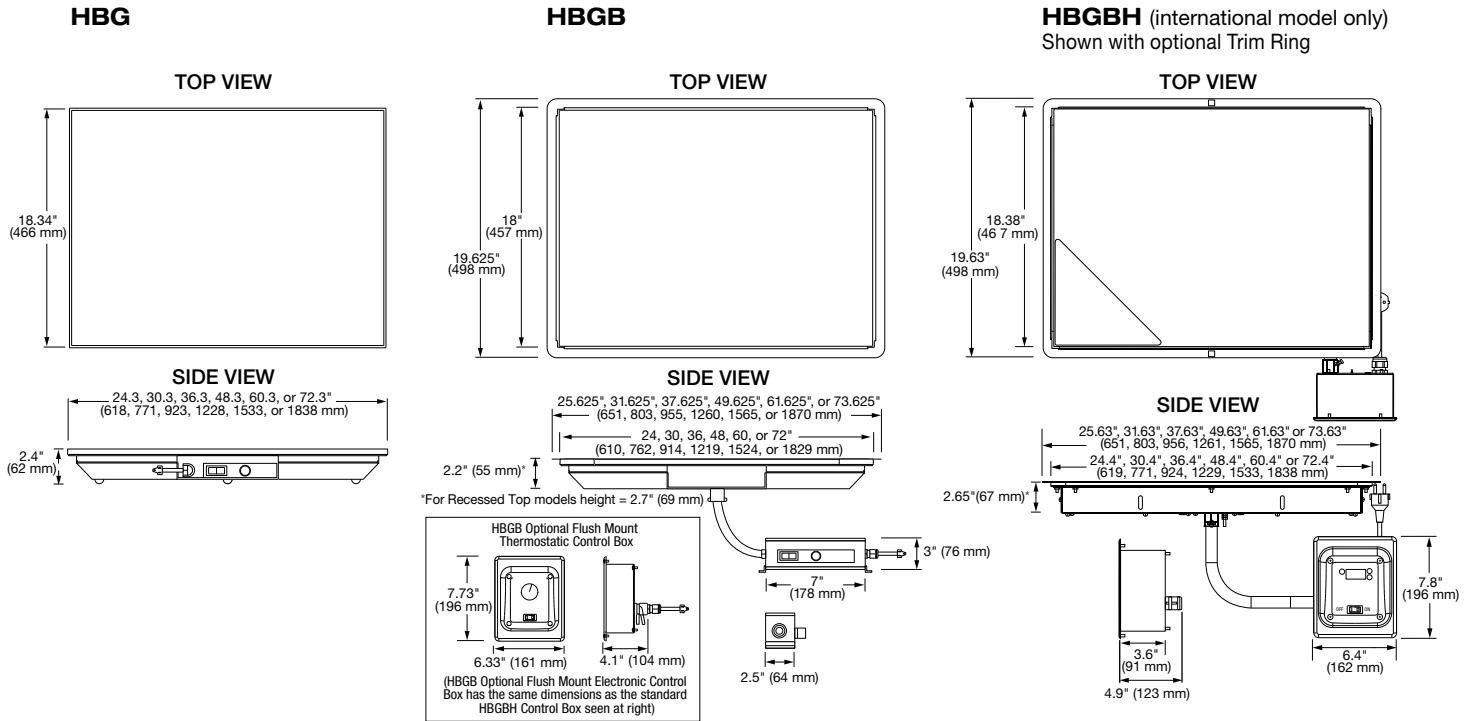

SPECIFICATIONS

Portable Rectangular Heated Black Glass Shelves

The shaded areas contain electrical information for International models

| Model | Dimensions (Width x Depth x Height*) | Voltage | Watts | Amps | Plug | Ship Weight* |
|------------|---|--------------|-----------|---------|--------------------|--------------------|
| HBG-2418 | 24.3" x 18.3" x 2.4" (618 x 466 x 62 mm) | 100 | 425 | 4.3 | NEMA 5-15P | 29 lbs. (14 kg) |
| | | 120 | 425 | 3.5 | NEMA 5-15P | |
| | | 220-230 (CE) | 420-459 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 459-500 | 2.0-2.1 | BS-1363 or AS 3112 | |
| HBG-3018 | 30.3" x 18.3" x 2.4" (771 x 466 x 62 mm) | 100 | 525 | 5.3 | NEMA 5-15P | 33 lbs. (15 kg) |
| | | 120 | 525 | 4.4 | NEMA 5-15P | |
| | | 220-230 (CE) | 525-574 | 2.4-2.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 574-625 | 2.5-2.6 | BS-1363 or AS 3112 | |
| HBG-3618 • | 36.3" x 18.3" x 6.125" (923 x 466 x 156 mm) | 100 | 630 | 6.3 | NEMA 5-15P | 36 lbs. (17 kg) |
| | | 120 | 630 | 5.3 | NEMA 5-15P | |
| | | 220-230 (CE) | 630-689 | 2.9-3.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 689-750 | 3.0-3.1 | BS-1363 or AS 3112 | |
| HBG-4818** | 48.3" x 18.3" x 6.125" (1228 x 466 x 156 mm) | 100 | 850 | 8.5 | NEMA 5-15P | 42 lbs. (19 kg) |
| | | 120 | 850 | 7.1 | NEMA 5-15P | |
| | | 220-230 (CE) | 840-918 | 3.8-4.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 918-1000 | 4.0-4.2 | BS-1363 or AS 3112 | |
| HBG-6018** | 60.3" x 18.3" x 6.125" (1533 x 466 x 156 mm) | 100 | 1050 | 10.5 | NEMA 5-15P | 60 lbs. (28 kg) |
| | | 120 | 1050 | 8.8 | NEMA 5-15P | |
| | | 220-230 (CE) | 1050-1148 | 4.8-5.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1148-1250 | 5.0-5.2 | BS-1363 or AS 3112 | |
| HBG-7218** | 72.3" x 18.3" x 6.125" (1838 x 466 x 156 mm) | 100 | 1260 | 12.6 | NEMA 5-15P | 68 lbs. (31 kg) |
| | | 120 | 1260 | 10.5 | NEMA 5-15P | |
| | | 220-230 (CE) | 1260-1378 | 5.7-6.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1378-1500 | 6.0-6.3 | BS-1363 or AS 3112 | |

- ▲ For Angled Food Stop option, add 0.5" (13 mm) to the Width, Depth and Height dimensions.
- * Shipping weight includes packaging.
- AS3112 plug is for use in Australia only.
- Height includes standard 4" legs.
- + Units 48" (1219 mm) and larger are constructed of two equal size pieces of glass which create a seam.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipmentsales@hatcocorp.com | intl@hatcocorp.com



Heated Black Glass Shelves

HBG-2418, -3018, -3618, -4818, -6018, -7218, HBGB-2418, -3018, -3618, -4818, -6018, -7218
 HBGBH-2418, -3018, -3618, -4818, -6018, -7218 (HBGBH is an international model only)

SPECIFICATIONS

Built-In Rectangular Heated Black Glass Shelves

The shaded areas contain electrical information for International models

STANDARD WATTAGE

| Model ^ | Dimensions (Width x Depth x Height) | Voltage | Watts | Amps | Plug | Ship Weight* |
|------------------------|--|--------------|----------------------|---------|----------------------|--------------------|
| HBGB-2418 | 25.625" x 19.625" x 2.2" (651 x 498 x 55 mm) | 100 | 425 | 4.3 | NEMA 5-15P | 32 lbs. (15 kg) |
| | | 120 | 425 | 3.5 | NEMA 5-15P | |
| | | 220-230 (CE) | 420-459 | 1.9-2.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 459-500 | 2.0-2.1 | BS-1363 or AS 3112 ■ | |
| HBGB-3018 | 31.625" x 19.625" x 2.2" (803 x 498 x 55 mm) | 100 | 525 | 5.3 | NEMA 5-15P | 37 lbs. (17 kg) |
| | | 120 | 525 | 4.4 | NEMA 5-15P | |
| | | 220-230 (CE) | 525-574 | 2.4-2.5 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 574-625 | 2.5-2.6 | BS-1363 or AS 3112 ■ | |
| | | 220-230 | 1050-1147 | 4.8-5.0 | CEE 7/7 Schuko | |
| 230-240 | 1147-1249 | 5.0-5.2 | BS-1363 or AS 3112 ■ | | | |
| HBGB-3618 | 37.625" x 19.625" x 2.2" (955 x 498 x 55 mm) | 100 | 630 | 6.3 | NEMA 5-15P | 40 lbs. (19 kg) |
| | | 120 | 630 | 5.3 | NEMA 5-15P | |
| | | 220-230 (CE) | 630-689 | 2.9-3.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 689-750 | 3.0-3.1 | BS-1363 or AS 3112 ■ | |
| HBGB-4818 ⁺ | 49.625" x 19.625" x 2.2" (1260 x 498 x 55 mm) | 100 | 850 | 8.5 | NEMA 5-15P | 50 lbs. (23 kg) |
| | | 120 | 850 | 7.1 | NEMA 5-15P | |
| | | 220-230 (CE) | 840-918 | 3.8-4.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 918-1000 | 4.0-4.2 | BS-1363 or AS 3112 ■ | |
| HBGB-6018 ⁺ | 61.625" x 19.625" x 2.2" (1565 x 498 x 55 mm) | 100 | 1050 | 10.5 | NEMA 5-15P | 63 lbs. (29 kg) |
| | | 120 | 1050 | 8.8 | NEMA 5-15P | |
| | | 220-230 (CE) | 1050-1148 | 4.8-5.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1148-1250 | 5.0-5.2 | BS-1363 or AS 3112 ■ | |
| HBGB-7218 ⁺ | 73.625" x 19.625" x 2.2" (1870 x 498 x 55 mm) | 100 | 1260 | 12.6 | NEMA 5-15P | 74 lbs. (34 kg) |
| | | 120 | 1260 | 10.5 | NEMA 5-15P | |
| | | 220-230 (CE) | 1260-1378 | 5.7-6.0 | CEE 7/7 Schuko | |
| | | 230-240 (CE) | 1378-1500 | 6.0-6.3 | BS-1363 or AS 3112 ■ | |

HIGH WATTAGE - For International use only

The shaded areas contain electrical information for International models

| Model * | Dimensions (Width x Depth x Height) | Voltage | Watts | Amps | Plug | Ship Weight* |
|-------------------------|--|----------|-------|------|--------------------------------------|--------------------|
| HBGBH-2418 | 25.63" x 19.625" x 2.65" (651 x 498 x 67 mm) | 230 (CE) | 634 | 2.8 | CEE 7/7 Schuko BS1363 or AS3112 ■ | 29 lbs. (14 kg) |
| HBGBH-3018 | 31.625" x 19.625" x 2.65" (803 x 498 x 67 mm) | | 809 | 3.5 | | 33 lbs. (15 kg) |
| HBGBH-3618 | 37.63" x 19.625" x 2.65" (956 x 498 x 67 mm) | | 984 | 4.3 | | 38 lbs. (18 kg) |
| HBGBH-4818 ⁺ | 49.63" x 19.625" x 2.65" (1261 x 498 x 67 mm) | | 1268 | 5.5 | | 47 lbs. (22 kg) |
| HBGBH-6018 ⁺ | 61.63" x 19.625" x 2.65" (1565 x 498 x 67 mm) | | 1618 | 7.0 | | 55 lbs. (25 kg) |
| HBGBH-7218 ⁺ | 73.63" x 19.625" x 2.65" (1870 x 498 x 67 mm) | | 1968 | 8.6 | | 64 lbs. (29 kg) |

^ Recommended for use in a metallic countertop. For other surfaces, verify material is suitable for temperatures up to 200°F (93°C).

* Shipping weight includes packaging.

■ AS3112 plug is for use in Australia only.

+ Units 48" (1219 mm) and larger are constructed of two equal size pieces of glass which create a seam.

* Recommended for use in a metallic countertop. For other surfaces, verify material is suitable for temperatures up to 257°F (125°C).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



Heated Black Glass Shelves


HBG-2418, -3018, -3618, -4818, -6018, -7218, HBGB-2418, -3018, -3618, -4818, -6018, -7218
 HBGBH-2418, -3018, -3618, -4818, -6018, -7218 (HBGBH is an international model only)

CORD LOCATION

HBG: Center of side with switch.
 HBGB and HBGBH: End of remote enclosure.

PLUG CONFIGURATIONS

Please refer to electrical specifications shown in charts.

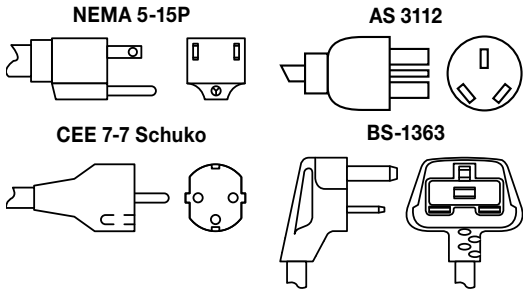

Countertop Cutout Dimensions for Built-Ins

| Model | Min. Width | Max. Width | Min. Depth | Max. Depth |
|------------------|-------------------|-------------------|------------------|------------------|
| HBGB, HBGBH-2418 | 24.625" (625 mm) | 24.875" (632 mm) | 18.625" (473 mm) | 18.875" (480 mm) |
| HBGB, HBGBH-3018 | 30.625" (778 mm) | 30.875" (784 mm) | 18.625" (473 mm) | 18.875" (480 mm) |
| HBGB, HBGBH-3618 | 36.625" (930 mm) | 36.875" (937 mm) | 18.625" (473 mm) | 18.875" (480 mm) |
| HBGB, HBGBH-4818 | 48.625" (1235 mm) | 48.875" (1241 mm) | 18.625" (473 mm) | 18.875" (480 mm) |
| HBGB, HBGBH-6018 | 60.625" (1540 mm) | 60.875" (1546 mm) | 18.625" (473 mm) | 18.875" (480 mm) |
| HBGB, HBGBH-7218 | 72.625" (1845 mm) | 72.875" (1851 mm) | 18.625" (473 mm) | 18.875" (480 mm) |

Control Box Cutout Dimensions for Built-Ins

| Model | Width | Height | Depth |
|------------------|-----------------|-----------------|----------------|
| HBGB standard | 7.25" (238 mm) | 3.25" (83 mm) | 2.75" (70 mm) |
| HBGB-FLUSH-ITC | 5.875" (149 mm) | 6.375" (162 mm) | 4.75" (121 mm) |
| HBGB-FLUSH-TSTAT | 5.875" (149 mm) | 6.375" (162 mm) | 4" (102 mm) |
| HBGBH standard | 5.875" (149 mm) | 6.375" (162 mm) | 4.75" (121 mm) |

PRODUCT SPECS

Heated Black Glass Shelf

The Heated Black Glass Shelf shall be a Hatco Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Heated Black Glass Shelf shall be rated at ... watts, volts, and ... inches

(millimeters) in overall width. It shall consist of food-safe material, thermostatically-controlled heated base, and a 6' (1829 mm) cord with plug attached or a remote box with 3' (914 mm) conduit (HBGB models only).

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com