

A woman dressed as a chef in a white double-breasted jacket, white apron, and black cap is walking through a walk-in freezer aisle. She is carrying a silver tray with several yellow-wrapped items. The aisle is lined with metal shelving units holding various boxes and supplies. The floor is made of perforated metal.

**Five great reasons to  
choose a Polar-Pak® System**





## 1 THE INDUSTRY'S SIMPLEST INSTALLATION

Polar-Pak can easily be installed in practically no time at all without the services of a refrigeration technician or plumber.

Corners, wall panels and doors are quickly assembled on the unit's floor (or screeds), and the ceiling panels lifted into place. Then the self-contained wall-mount refrigeration unit, equipped with casters for leveling, is simply rolled up and fitted into place. The top mount system is shipped ready to fit into the appropriate ceiling panel, and is simply lifted into position and then bolted into place. Wiring the refrigeration system can be as simple as attaching a pigtail and plugging the unit into the wall. No drain line is required on indoor installations - making Polar-Pak ideal for basements and upper-floor applications.

*Note: Outdoor Polar-Pak require engineering review to comply with seismic, wind and snow load requirements and need drain lines (field supplied and installed).*

## 2 UNSURPASSED QUALITY

Polar-Pak coolers and freezers are made with the same rugged, high performance construction that has made Kolpak the leader in walk-in refrigeration.

The Polar-Pak modular panels of 4" 100% foamed in place non-CFC urethane foam offer superior insulating capabilities. The exterior and interior of top-quality galvalume metal offer an attractive and rugged finish.

Polar-Pak also offers superior air circulation around the coils making it both economical and efficient to run.

## 3 HOST OF INNOVATIVE STANDARD FEATURES

- Top-mount refrigeration is flush to the interior.
- Hot gas condensate evaporator.
- Superior door construction to seal in cold, prevent condensation.
- Posi-Loc panel fasteners for a perfect airtight fit.
- Adjustable spring loaded hinges.
- Interior safety release to prevent accidental entrapment.
- Coved corners on floor panels for easier cleaning, greater sanitation.
- Heated air-vents on freezers to eliminate vacuum and pressure build-up.
- Vapor-proof interior light with convenient switch.
- Easy to adjust digital temperature control

## 4 NO OTHER MANUFACTURER OFFERS YOU GREATER FLEXIBILITY

Polar-Pak is flexible enough to be used in virtually any configuration. There's no need for numbered panels.

## 5 QUICK SHIP

Models beginning with QS are our Quick Ship models and are available within 48 hours after your order has been received.

Orders specifying options will require standard lead times for shipping.



**The Polar-Pak System is the answer for your indoor AND outdoor applications.**




**Available in both top-mount and side-mount models.**




**Top-mount refrigeration is flush to the interior.**

**There are many more reasons to buy  
Polar-Pak System coolers and freezers...**

**FRONT**

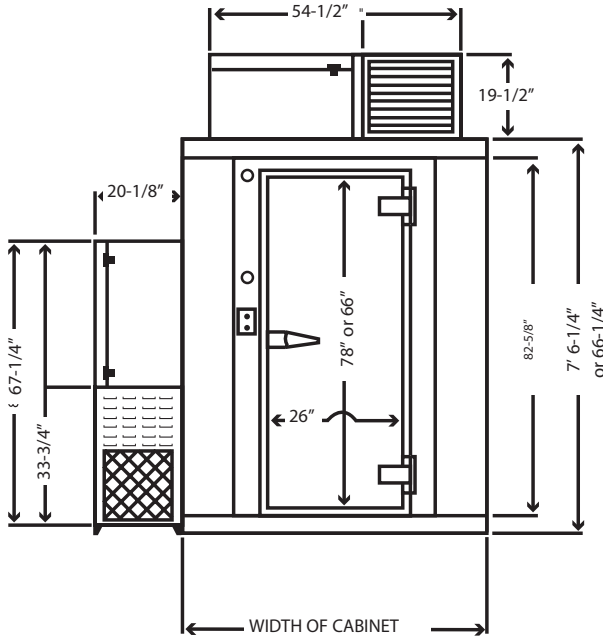

**LEFT SIDE**

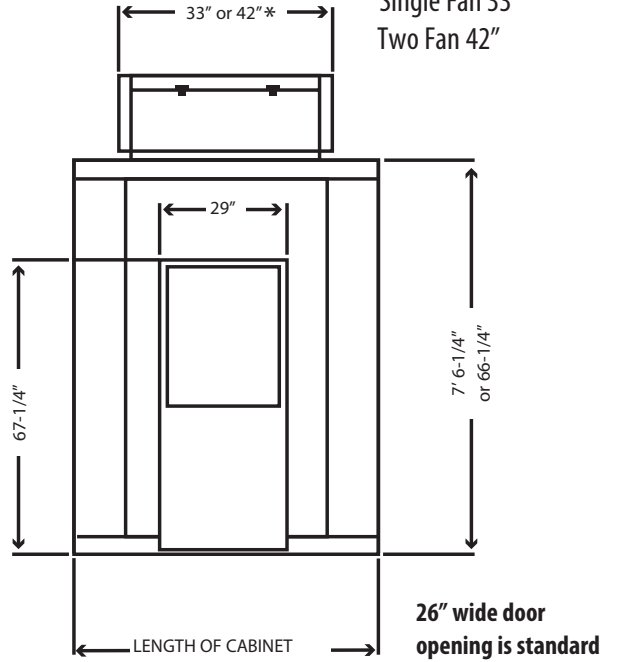

\*Single Fan 33"  
Two Fan 42"

**26" wide door opening is standard**

**NOTE:**

Self-contained units require at least 18" of clearance on top mount models and at least 2' of clearance on sides and back of side mount models for air circulation around refrigeration system.

Specifications subject to change without notice.

**Key: ● Standard ○ Optional**

	Cooler	Freezer		Cooler	Freezer		Cooler	Freezer
Air cooled condensing units	●	●	100% Foamed-in-place polyurethane insulation (4")	●	●	Outdoor package	○	○
Aluminum diamond tread plates (1/8", 3/16" or 1/4")	○	○	Foamed in place panel gaskets	●	●	NSF panels	●	●
Automatic condensate evaporator (indoor units)	●	●	Galvalume interior and exterior	●	●	Non-skid floor strips	○	○
Bumper rails and door bumpers	○	○	High pressure safety control	●	●	Timed Off coil defrost system	●	●
Combination construction	○	○	Holding only refrigeration systems	●	●	Outdoor rain hoods	○	○
Defrost timer	●	●	Inside safety release	●	●	Outside locking bar	○	○
Dial thermometer	●	●	Interior .100" aluminum floor	●	●	Self closing door	●	●
Door heater		●	Interior aluminum ramps (34" x 20")	○	○	Shelving kits: three and four tier	○	○
Electric coil defrost system (indoor units)		●	Interior vapor proof light	●	●	Strip curtains	○	○
Expansion valve systems	●	●	Keyed door locks	●	●	UL door section	●	●
Exterior aluminum or stainless ramps (34" x 36")	○	○	Kick plates (3' x 3')	○	○	UL panels (fire rated)	●	●
Fluorescent lights	○	○	Low ambient controls	○	○	1 year parts warranty	●	●
			Magnetic door gaskets	●	●	10 year panel warranty	●	●
			Membrane roof caps (side mount units)	○	○	5 year compressor warranty-option	●	●
						1 year labor warranty	●	●
						30" or 34" wide door opening	○	○

**With Floor**

**Coolers: 38°F - 6' 6-1/4" High**

Top Mount	Side Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
P6-054-CT	+P6-054-CS	4'10-1/2"x 3'11"	26" x 66"	80 cu. Ft.	1	1/3 hp	8.4	115/60/1	742
P6-064-CT	+P6-064-CS	5'10"x 3'11"	26" x 66"	98 cu. Ft.	1	1/3 hp	8.4	115/60/1	879
P6-066-CT	P6-066-CS	5'10"x 5'10"	26" x 66"	156 cu. Ft.	1	1/2 hp	9.9	115/60/1	1065
P6-068-CT	P6-068-CS	5'10"x 7'9"	26" x 66"	213 cu. Ft.	1	1/2 hp	9.9	115/60/1	1113
P6-0610-CT	P6-0610-CS	5'10"x 9'8"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1304
P6-0612-CT	P6-0612-CS	5'10"x 11'7"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1434
P6-086-CT	P6-086-CS	7'9" x 5'10"	26" x 66"	80 cu. Ft.	1	1/2 hp	9.9	115/60/1	1113
P6-088-CT	P6-088-CS	7'9" x 7'9"	26" x 66"	293 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1325
P6-0810-CT	P6-0810-CS	7'9" x 9'8"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1503
P6-0812-CT	P6-0812-CS	7'9" x 11'7"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1662
P6-106-CT	P6-106-CS	9'8" x 5'10"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1304
P6-108-CT	P6-108-CS	9'8" x 7'9"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1503
P6-1010-CT	P6-1010-CS	9'8" x 9'8"	26" x 66"	477 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1690
P6-126-CT	P6-126-CS	11'7" x 5'10"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1434
P6-128-CT	P6-128-CS	11'7" x 7'9"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1662

**With Floor**

**Freezers -10°F - 6' 6-1/4" High**

Top Mount	Side Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
P6-054-FT	+P6-054-FS	4'10-1/2"x 3'11"	26" x 66"	80 cu. Ft.	1	1 hp	10.6	208-230/60/1	879
P6-064-FT	+P6-064-FS	5'10"x 3'11"	26" x 66"	98 cu. Ft.	1	1 hp	10.6	208-230/60/1	903
P6-066-FT	P6-066-FS	5'10"x 5'10"	26" x 66"	156 cu. Ft.	1	1 hp	10.6	208-230/60/1	1065
P6-068-FT	P6-068-FS	5'10"x 7'9"	26" x 66"	213 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1213
P6-0610-FT	P6-0610-FS	5'10"x 9'8"	26" x 66"	271 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1369
P6-0612-FT	P6-0612-FS	5'10"x 11'7"	26" x 66"	332 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1434
P6-086-FT	P6-086-FS	7'9" x 5'10"	26" x 66"	80 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1213
P6-088-FT	P6-088-FS	7'9" x 7'9"	26" x 66"	293 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1390
P6-0810-FT	P6-0810-FS	7'9" x 9'8"	26" x 66"	372 cu. Ft.	2	2 hp	18.8	208-230/60/1	1568
P6-0812-FT	P6-0812-FS	7'9" x 11'7"	26" x 66"	455 cu. Ft.	2	2 hp	18.8	208-230/60/1	1662
P6-106-FT	P6-106-FS	9'8" x 5'10"	26" x 66"	271 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1369
P6-108-FT	P6-108-FS	9'8" x 7'9"	26" x 66"	372 cu. Ft.	2	2 hp	18.8	208-230/60/1	1568
P6-1010-FT	P6-1010-FS	9'8" x 9'8"	26" x 66"	477 cu. Ft.	2	2 hp	18.8	208-230/60/1	1690
P6-126-FT	P6-126-FS	11'7" x 5'10"	26" x 66"	332 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1434
P6-128-FT	P6-128-FS	11'7" x 7'9"	26" x 66"	455 cu. Ft.	2	2 hp	18.8	208-230/60/1	1662

**Floorless**

**Coolers: 38°F - 6' 6-1/4" High**

Top Mount	Side Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
PX6-054-CT	+PX6-054-CS	4'10-1/2"x 3'11"	26" x 66"	80 cu. Ft.	1	1/3 hp	8.4	115/60/1	662
PX6-064-CT	+PX6-064-CS	5'10"x 3'11"	26" x 66"	98 cu. Ft.	1	1/3 hp	8.4	115/60/1	707
PX6-066-CT	PX6-066-CS	5'10"x 5'10"	26" x 66"	156 cu. Ft.	1	1/2 hp	9.9	115/60/1	821
PX6-068-CT	PX6-068-CS	5'10"x 7'9"	26" x 66"	213 cu. Ft.	1	1/2 hp	9.9	115/60/1	921
PX6-0610-CT	PX6-0610-CS	5'10"x 9'8"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1064
PX6-0612-CT	PX6-0612-CS	5'10"x 11'7"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1146
PX6-086-CT	PX6-086-CS	7'9" x 5'10"	26" x 66"	80 cu. Ft.	1	1/2 hp	9.9	115/60/1	977
PX6-088-CT	PX6-088-CS	7'9" x 7'9"	26" x 66"	293 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1069
PX6-0810-CT	PX6-0810-CS	7'9" x 9'8"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1183
PX6-0812-CT	PX6-0812-CS	7'9" x 11'7"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1253
PX6-106-CT	PX6-106-CS	9'8" x 5'10"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1064
PX6-108-CT	PX6-108-CS	9'8" x 7'9"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1183
PX6-1010-CT	PX6-1010-CS	9'8" x 9'8"	26" x 66"	477 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1442
PX6-126-CT	PX6-126-CS	11'7" x 5'10"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1236
PX6-128-CT	PX6-128-CS	11'7" x 7'9"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1346

Note: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.

+ = Refrigeration must be on 5' wall

26 gauge Stucco Embossed Galvalume Steel, interior and exterior.

Outdoor units require Engineering Review based on install location

**Specifications:**

**Interior Finish:** 26 gauge embossed galvalume **Interior Floor:** .100" smooth aluminum

**Exterior Finish:** 26 gauge embossed galvalume **Thermometer:** 2 1/2" dial type

**Insulation:** 4" 100% foam-in-place polyurethane

**Options & Accessories:**

Cooler/freezer Combinations are available using listed compartment sizes.

30" and 34" wide doors. Contact factory for additional options and accessories.

**With Floor**

**Coolers: 38°F - 7'6-1/4" High**

Top Mount	Side Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
P7-054-CT	+P7-054-CS	4'10-1/2"x 3'11"	26" x 78"	84 cu. ft.	1	1/3 hp	8.4	115/60/1	1013
P7-064-CT	+P7-064-CS	5'10"x 3'11"	26" x 78"	116 cu. ft.	1	1/3 hp	8.4	115/60/1	1013
P7-066-CT	P7-066-CS	5'10"x 5'10"	26" x 78"	184 cu. ft.	1	1/2 hp	9.9	115/60/1	1013
P7-068-CT	P7-068-CS	5'10"x 7'9"	26" x 78"	252 cu. ft.	1	1/2 hp	9.9	115/60/1	1169
P7-0610-CT	P7-0610-CS	5'10"x 9'8"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	**115/60/1	1368
P7-0612-CT	P7-0612-CS	5'10"x 11'7"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1524
P7-086-CT	P7-086-CS	7'9" x 5'10"	26" x 78"	252 cu. ft.	1	1/2 hp	9.9	115/60/1	1169
P7-088-CT	P7-088-CS	7'9" x 7'9"	26" x 78"	345 cu. ft.	2	3/4 hp	16.3	*115/60/1	1391
P7-0810-CT	P7-0810-CS	7'9" x 9'8"	26" x 78"	439 cu. ft.	2	3/4 hp	16.3	*115/60/1	1573
P7-0812-CT	P7-0812-CS	7'9" x 11'7"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1762
P7-106-CT	P7-106-CS	9'8" x 5'10"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	*115/60/1	1368
P7-108-CT	P7-108-CS	9'8" x 7'9"	26" x 78"	439 cu. ft.	2	3/4 hp	16.3	*115/60/1	1573
P7-1010-CT	P7-1010-CS	9'8" x 9'8"	26" x 78"	558 cu. ft.	2	1 hp	16.8	**115/60/1	1790
P7-126-CT	P7-126-CS	11'7" x 5'10"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1524
P7-128-CT	P7-128-CS	11'7" x 7'9"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1762

**With Floor**

**Freezers -10°F - 7'6-1/4" High**

Top Mount	Side Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
P7-054-FT	+P7-054-FS	4'10-1/2"x 3'11"	26" x 78"	84 cu. ft.	1	1 hp	10.6	208-230/60/1	1013
P7-064-FT	+P7-064-FS	5'10"x 3'11"	26" x 78"	116 cu. ft.	1	1 hp	10.6	208-230/60/1	1013
P7-066-FT	P7-066-FS	5'10"x 5'10"	26" x 78"	184 cu. ft.	1	1 hp	10.6	208-230/60/1	1113
P7-068-FT	P7-068-FS	5'10"x 7'9"	26" x 78"	252 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1269
P7-0610-FT	P7-0610-FS	5'10"x 9'8"	26" x 78"	320 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1433
P7-0612-FT	P7-0612-FS	5'10"x 11'7"	26" x 78"	388 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1524
P7-086-FT	P7-086-FS	7'9" x 5'10"	26" x 78"	252 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1269
P7-088-FT	P7-088-FS	7'9" x 7'9"	26" x 78"	345 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1456
P7-0810-FT	P7-0810-FS	7'9" x 9'8"	26" x 78"	439 cu. ft.	2	2 hp	18.8	208-230/60/1	1573
P7-0812-FT	P7-0812-FS	7'9" x 11'7"	26" x 78"	532 cu. ft.	2	2 hp	18.8	208-230/60/1	1762
P7-106-FT	P7-106-FS	9'8" x 5'10"	26" x 78"	320 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1433
P7-108-FT	P7-108-FS	9'8" x 7'9"	26" x 78"	439 cu. ft.	2	2 hp	18.8	208-230/60/1	1638
P7-1010-FT	P7-1010-FS	9'8" x 9'8"	26" x 78"	558 cu. ft.	2	2 hp	18.8	208-230/60/1	1790
P7-126-FT	P7-126-FS	11'7" x 5'10"	26" x 78"	388 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1524
P7-128-FT	P7-128-FS	11'7" x 7'9"	26" x 78"	532 cu. ft.	2	2 hp	18.8	208-230/60/1	1762

**Floorless**

**Coolers: 38°F - 7'6-1/4" High**

Top Mount	Side Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
PX7-054-CT	+PX7-054-CS	4'10-1/2"x 3'11"	26" x 78"	84 cu. ft.	1	1/3 hp	8.4	115/60/1	869
PX7-064-CT	+PX7-064-CS	5'10"x 3'11"	26" x 78"	116 cu. ft.	1	1/2 hp	9.9	115/60/1	869
PX7-066-CT	PX7-066-CS	5'10"x 5'10"	26" x 78"	184 cu. ft.	1	1/2 hp	9.9	115/60/1	869
PX7-068-CT	PX7-068-CS	5'10"x 7'9"	26" x 78"	252 cu. ft.	2	3/4 hp	16.3	115/60/1	977
PX7-0610-CT	PX7-0610-CS	5'10"x 9'8"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	*115/60/1	1128
PX7-0612-CT	PX7-0612-CS	5'10"x 11'7"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1236
PX7-086-CT	PX7-086-CS	7'9" x 5'10"	26" x 78"	252 cu. ft.	2	3/4 hp	16.3	115/60/1	977
PX7-088-CT	PX7-088-CS	7'9" x 7'9"	26" x 78"	345 cu. ft.	2	3/4 hp	16.3	*115/60/1	1135
PX7-0810-CT	PX7-0810-CS	7'9" x 9'8"	26" x 78"	439 cu. ft.	2	1 hp	16.8	**115/60/1	1253
PX7-0812-CT	PX7-0812-CS	7'9" x 11'7"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1346
PX7-106-CT	PX7-106-CS	9'8" x 5'10"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	*115/60/1	1128
PX7-108-CT	PX7-108-CS	9'8" x 7'9"	26" x 78"	439 cu. ft.	2	1 hp	16.8	**115/60/1	1253
PX7-1010-CT	PX7-1010-CS	9'8" x 9'8"	26" x 78"	558 cu. ft.	2	1 hp	16.8	*115/60/1	1442
PX7-126-CT	PX7-126-CS	11'7" x 5'10"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1236
PX7-128-CT	PX7-128-CS	11'7" x 7'9"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1346

Note: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.

+ = Refrigeration must be on 5' wall

26 gauge Stucco Embossed Galvalume Steel, interior and exterior.

Outdoor units require Engineering Review based on install location

**Specifications:**

**Interior Finish:** 26 gauge embossed galvalume    **Interior Floor:** .100" smooth aluminum

**Exterior Finish:** 26 gauge embossed galvalume    **Thermometer:** 2 1/2" dial type

**Insulation:** 4" 100% foam-in-place polyurethane

**Options & Accessories:**

Cooler/freezer Combinations are available using listed compartment sizes.

30" and 34" wide doors. Contact factory for additional options and accessories.

**With Floor Coolers: 38°F - 6'-6-1/4" High**

Top Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
Q56-054-CT	4'10-1/2"x 3'11"	26" x 66"	80 cu. Ft.	1	1/3 hp	8.4	115/60/1	742
Q56-064-CT	5'10"x 3'11"	26" x 66"	98 cu. Ft.	1	1/3 hp	8.4	115/60/1	879
Q56-066-CT	5'10"x 5'10"	26" x 66"	156 cu. Ft.	1	1/2 hp	9.9	115/60/1	1065
Q56-068-CT	5'10"x 7'9"	26" x 66"	213 cu. Ft.	1	1/2 hp	9.9	115/60/1	1113
Q56-0610-CT	5'10"x 9'8"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1304
Q56-0612-CT	5'10"x 11'7"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1434
Q56-086-CT	7'9" x 5'10"	26" x 66"	80 cu. Ft.	1	1/2 hp	9.9	115/60/1	1113
Q56-088-CT	7'9" x 7'9"	26" x 66"	293 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1325
Q56-0810-CT	7'9" x 9'8"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1503
Q56-0812-CT	7'9" x 11'7"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1662
Q56-106-CT	9'8" x 5'10"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1304
Q56-108-CT	9'8" x 7'9"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1503
Q56-1010-CT	9'8" x 9'8"	26" x 66"	477 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1690
Q56-126-CT	11'7" x 5'10"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1434
Q56-128-CT	11'7" x 7'9"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1662

**With Floor Freezers -10°F - 6'-6-1/4" High**

Top Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
Q56-054-FT	4'10-1/2"x 3'11"	26" x 66"	80 cu. Ft.	1	1 hp	10.6	208-230/60/1	879
Q56-064-FT	5'10"x 3'11"	26" x 66"	98 cu. Ft.	1	1 hp	10.6	208-230/60/1	903
Q56-066-FT	5'10"x 5'10"	26" x 66"	156 cu. Ft.	1	1 hp	10.6	208-230/60/1	1065
Q56-068-FT	5'10"x 7'9"	26" x 66"	213 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1213
Q56-0610-FT	5'10"x 9'8"	26" x 66"	271 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1369
Q56-0612-FT	5'10"x 11'7"	26" x 66"	332 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1434
Q56-086-FT	7'9" x 5'10"	26" x 66"	80 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1213
Q56-088-FT	7'9" x 7'9"	26" x 66"	293 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1390
Q56-0810-FT	7'9" x 9'8"	26" x 66"	372 cu. Ft.	2	2 hp	18.8	208-230/60/1	1568
Q56-0812-FT	7'9" x 11'7"	26" x 66"	455 cu. Ft.	2	2 hp	18.8	208-230/60/1	1662
Q56-106-FT	9'8" x 5'10"	26" x 66"	271 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1369
Q56-108-FT	9'8" x 7'9"	26" x 66"	372 cu. Ft.	2	2 hp	18.8	208-230/60/1	1568
Q56-1010-FT	9'8" x 9'8"	26" x 66"	477 cu. Ft.	2	2 hp	18.8	208-230/60/1	1690
Q56-126-FT	11'7" x 5'10"	26" x 66"	332 cu. Ft.	2	1 1/2 hp	13.5	208-230/60/1	1434
Q56-128-FT	11'7" x 7'9"	26" x 66"	455 cu. Ft.	2	2 hp	18.8	208-230/60/1	1662

**Floorless Coolers: 38°F - 6'-3-3/4" High**

Top Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
Q5X6-054-CT	4'10-1/2"x 3'11"	26" x 66"	80 cu. Ft.	1	1/3 hp	8.4	115/60/1	662
Q5X6-064-CT	5'10"x 3'11"	26" x 66"	98 cu. Ft.	1	1/3 hp	8.4	115/60/1	707
Q5X6-066-CT	5'10"x 5'10"	26" x 66"	156 cu. Ft.	1	1/2 hp	9.9	115/60/1	821
Q5X6-068-CT	5'10"x 7'9"	26" x 66"	213 cu. Ft.	1	1/2 hp	9.9	115/60/1	921
Q5X6-0610-CT	5'10"x 9'8"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1064
Q5X6-0612-CT	5'10"x 11'7"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1146
Q5X6-086-CT	7'9" x 5'10"	26" x 66"	80 cu. Ft.	1	1/2 hp	9.9	115/60/1	977
Q5X6-088-CT	7'9" x 7'9"	26" x 66"	293 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1069
Q5X6-0810-CT	7'9" x 9'8"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1183
Q5X6-0812-CT	7'9" x 11'7"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1253
Q5X6-106-CT	9'8" x 5'10"	26" x 66"	271 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1064
Q5X6-108-CT	9'8" x 7'9"	26" x 66"	372 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1183
Q5X6-1010-CT	9'8" x 9'8"	26" x 66"	477 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1442
Q5X6-126-CT	11'7" x 5'10"	26" x 66"	332 cu. Ft.	2	3/4 hp	16.3	*115/60/1	1236
Q5X6-128-CT	11'7" x 7'9"	26" x 66"	455 cu. Ft.	2	1 hp	16.8	**115/60/1	1346

Note: Add "R" or "L" to end of Model Numbers above to designate Right or Left Door Hinge.

Note: "+" Refrigeration must be on 5 ft. wall

\* Top Mount refrigeration only for quick ship program.

Actual height for units without floors is 6' 3 3/4".

Actual height for units with floors is 6' 6 1/4".

26 x 78 door, right or left hinged, no options.

26 gauge Stucco Embossed Galvalume Steel, interior and exterior.

Outdoor units not available as Quick Ship

**Specifications:**

**Interior Finish:** 26 gauge embossed galvalume **Interior Floor:** .100" smooth aluminum

**Exterior Finish:** 26 gauge embossed galvalume **Thermometer:** 2 1/2" dial type

**Insulation:** 4" 100% foam-in-place polyurethane

**Options & Accessories:**

Cooler/freezer Combinations are available using listed compartment sizes. 30" and 34" wide doors. Contact factory for additional options and accessories.

With Floor

**Coolers: 38°F - 7'-6-1/4" High**

Top Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
Q57-054-CT	4'10-1/2"x 3'11"	26" x 78"	84 cu.ft.	1	1/3 hp	8.4	115/60/1	1013
Q57-064-CT	5'10"x 3'11"	26" x 78"	116 cu. ft.	1	1/3 hp	8.4	115/60/1	1013
Q57-066-CT	5'10"x 5'10"	26" x 78"	184 cu. ft.	1	1/2 hp	9.9	115/60/1	1013
Q57-068-CT	5'10"x 7'9"	26" x 78"	252 cu. ft.	1	1/2 hp	9.9	115/60/1	1169
Q57-0610-CT	5'10"x 9'8"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	*115/60/1	1368
Q57-0612-CT	5'10"x 11'7"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1524
Q57-086-CT	7'9" x 5'10"	26" x 78"	252 cu. ft.	1	1/2 hp	9.9	115/60/1	1169
Q57-088-CT	7'9" x 7'9"	26" x 78"	345 cu. ft.	2	3/4 hp	16.3	*115/60/1	1391
Q57-0810-CT	7'9" x 9'8"	26" x 78"	439 cu. ft.	2	3/4 hp	16.3	*115/60/1	1573
Q57-0812-CT	7'9" x 11'7"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1762
Q57-106-CT	9'8" x 5'10"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	*115/60/1	1368
Q57-108-CT	9'8" x 7'9"	26" x 78"	439 cu. ft.	2	3/4 hp	16.3	*115/60/1	1573
Q57-1010-CT	9'8" x 9'8"	26" x 78"	558 cu.ft.	2	1 hp	16.8	**115/60/1	1790
Q57-126-CT	11'7" x 5'10"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1524
Q57-128-CT	11'7" x 7'9"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1762

With Floor

**Freezers -10°F - 7'-6-1/4" High**

Top Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
Q57-054-FT	4'10-1/2"x 3'11"	26" x 78"	84 cu. ft.	1	1 hp	10.6	208-230/60/1	1013
Q57-064-FT	5'10"x 3'11"	26" x 78"	116 cu. ft.	1	1 hp	10.6	208-230/60/1	1013
Q57-066-FT	5'10"x 5'10"	26" x 78"	184 cu. ft.	1	1 hp	10.6	208-230/60/1	1113
Q57-068-FT	5'10"x 7'9"	26" x 78"	252 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1269
Q57-0610-FT	5'10"x 9'8"	26" x 78"	320 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1433
Q57-0612-FT	5'10"x 11'7"	26" x 78"	388 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1524
Q57-086-FT	7'9" x 5'10"	26" x 78"	252 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1269
Q57-088-FT	7'9" x 7'9"	26" x 78"	345 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1456
Q57-0810-FT	7'9" x 9'8"	26" x 78"	439 cu. ft.	2	2 hp	18.8	208-230/60/1	1573
Q57-0812-FT	7'9" x 11'7"	26" x 78"	532 cu. ft.	2	2 hp	18.8	208-230/60/1	1762
Q57-106-FT	9'8" x 5'10"	26" x 78"	320 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1433
Q57-108-FT	9'8" x 7'9"	26" x 78"	439 cu. ft.	2	2 hp	18.8	208-230/60/1	1638
Q57-1010-FT	9'8" x 9'8"	26" x 78"	558 cu.ft.	2	2 hp	18.8	208-230/60/1	1790
Q57-126-FT	11'7" x 5'10"	26" x 78"	388 cu. ft.	2	1 1/2 hp	13.5	208-230/60/1	1524
Q57-128-FT	11'7" x 7'9"	26" x 78"	532 cu. ft.	2	2 hp	18.8	208-230/60/1	1762

Floorless

**Coolers: 38°F - 7'-3-3/4" High**

Top Mount	Actual Size	Door Size	Capacity	Fans	Compressor	Amps	Electrical	Ship Weight
Q5X7-054-CT	4'10-1/2"x 3'11"	26" x 78"	84 cu. ft.	1	1/3 hp	8.4	115/60/1	869
Q5X7-064-CT	5'10"x 3'11"	26" x 78"	116 cu. ft.	1	1/2 hp	9.9	115/60/1	869
Q5X7-066-CT	5'10"x 5'10"	26" x 78"	184 cu. ft.	1	1/2 hp	9.9	115/60/1	869
Q5X7-068-CT	5'10"x 7'9"	26" x 78"	252 cu. ft.	2	3/4 hp	16.3	115/60/1	977
Q5X7-0610-CT	5'10"x 9'8"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	*115/60/1	1128
Q5X7-0612-CT	5'10"x 11'7"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1236
Q5X7-086-CT	7'9" x 5'10"	26" x 78"	252 cu. ft.	2	3/4 hp	16.3	115/60/1	977
Q5X7-088-CT	7'9" x 7'9"	26" x 78"	345 cu. ft.	2	3/4 hp	16.3	*115/60/1	1135
Q5X7-0810-CT	7'9" x 9'8"	26" x 78"	439 cu. ft.	2	1 hp	16.8	**115/60/1	1253
Q5X7-0812-CT	7'9" x 11'7"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1346
Q5X7-106-CT	9'8" x 5'10"	26" x 78"	320 cu. ft.	2	3/4 hp	16.3	*115/60/1	1128
Q5X7-108-CT	9'8" x 7'9"	26" x 78"	439 cu. ft.	2	1 hp	16.8	**115/60/1	1253
Q5X7-1010-CT	9'8" x 9'8"	26" x 78"	558 cu.ft.	2	1hp	16.8	*115/60/1	1442
Q5X7-126-CT	11'7" x 5'10"	26" x 78"	388 cu. ft.	2	3/4 hp	16.3	*115/60/1	1236
Q5X7-128-CT	11'7" x 7'9"	26" x 78"	532 cu. ft.	2	1 hp	16.8	**115/60/1	1346

\* Top Mount refrigeration only for quick ship program.

Actual height for units without floors is 7' 3 3/4".

Actual height for units with floors is 7' 6 1/4".

26 x 78 door, right or left hinged, no options.

26 gauge Stucco Embossed Galvalume Steel, interior and exterior.

Outdoor units not available as Quick Ship

**Specifications:**

**Interior Finish:** 26 gauge embossed galvalume **Interior Floor:** .100" smooth aluminum

**Exterior Finish:** 26 gauge embossed galvalume **Thermometer:** 2 1/2" dial type

**Insulation:** 4" 100% foam-in-place polyurethane

**Options & Accessories:**

Cooler/freezer Combinations are available using listed compartment sizes.

30" and 34" wide doors. Contact factory for additional options and accessories.

Manitowoc Foodservice is a global leader in foodservice operations that speaks the language of our partners from sales to aftercare. Purchasing equipment is easy with Maniowoc Finance, which offers direct, low-rate financing options for the equipment you need today. Maniowoc KitchenCare® helps service, maintain, and protect your foodservice equipment and facility throughout the lifecycle of your business. Being fluent is more than understanding equipment; it is an understanding of your foodservice business. If you're ready to talk foodservice, Maniowoc speaks your language.

Our best in class brands include: Cleveland, Convothem®, Dean®, Delfield®, Frymaster®, Garland®, Kolpak®, Koolaire®, Kysor Panel Systems®, Lincoln, Maniowoc® Beverage Systems, Maniowoc® Ice, Merco®, Merrychef®, Multiplex®, RDI Systems, Servend®, U.S. Range & Welbilt®



**Fluent in Foodservice** | [mtwfs.com](http://mtwfs.com)