


MULTI-LEVEL RACK


Features:

- All aluminum construction
- Pans are lip-hung on 9/16" pan supports on 1 1/2" centers
- 6" extruded side panels interlock to provide sanitary joint
- Ships knocked down

Options:

- Vinyl rack covers
- Tops: aluminum, stainless steel or polyethylene cutting board
- Pan Stop
- Wheel brakes
- Caster options

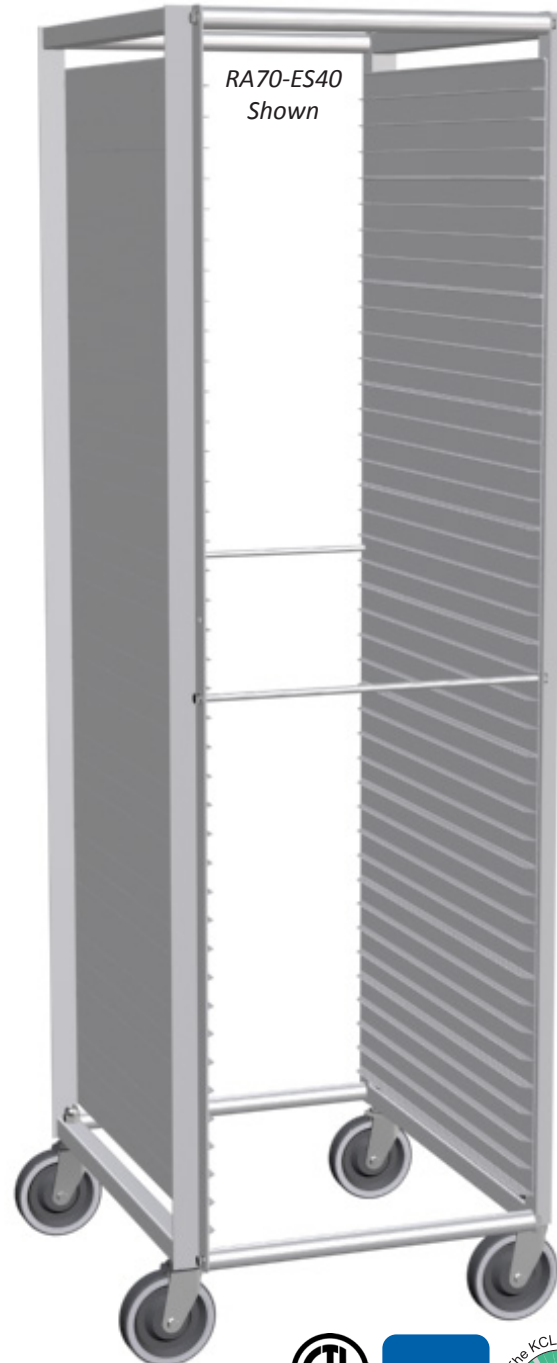

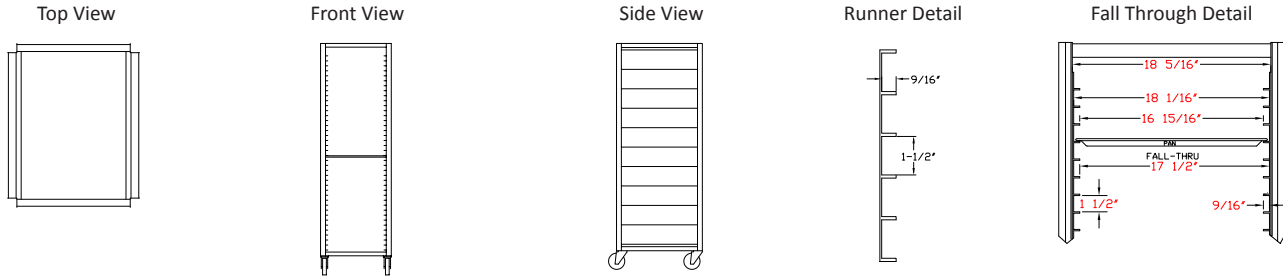

Lockwood Model No.	Angles	Center Spacing	Pan		Exterior Dimensions			Weight		
			Capacity	Size	Width	Depth	Height			
RA70-ES40	80	1 1/2"	40	18" x 26"	IN	21 5/16	26 1/2	69 3/4	LBS	52
					CM	54.13	67.31	177.17	KG	23.57
RA64-ES36	72	1 1/2"	36	18" x 26"	IN	21 5/16	26 1/2	63 3/4	LBS	48
					CM	54.13	67.31	161.93	KG	21.77
RA58-ES32	64	1 1/2"	32	18" x 26"	IN	21 5/16	26 1/2	57 3/4	LBS	43
					CM	54.13	67.31	146.69	KG	19.50
RA36-ES16	32	1 1/2"	16	18" x 26"	IN	21 5/16	26 1/2	35 3/4	LBS	28
					CM	54.13	67.31	90.81	KG	12.70
RA30-ES12	24	1 1/2"	12	18" x 26"	IN	21 5/16	26 1/2	29 3/4	LBS	24
					CM	54.13	67.31	75.57	KG	10.89

Rack Specifications:

- Uprights: 1/8" x 1 1/2" x 1 1/2" aluminum angle
- Spacer Bars: .083 x 1 1/8" aluminum tube with steel thread insert
- Casters: (4) 5" x 1 1/8" High Tech gray non-marking casters; load capacity 135 lbs each (61.23 kg); temp. range -45 °/ +180° F

Pan Support Specifications:

- 6" wide extruded aluminum panels
- Panels welded to uprights

Lockwood reserves the right to change materials and specifications without notice.