

MOBILE ANGLE RACK

Side Load Series


Features:

- All aluminum construction
- 1" x 1 1/2" x .080" extruded pan supports riveted to uprights
- Available in 2 1/2", 3" or 5" center spacing
- Available in 64" or 70" heights
- Available in custom sizes
- Ships knocked down

Options:

- Vinyl rack covers
- 3" pan supports
- Perimeter or corner bumpers
- Tops: aluminum, stainless
- Pan stop
- Wheel brakes
- Caster options



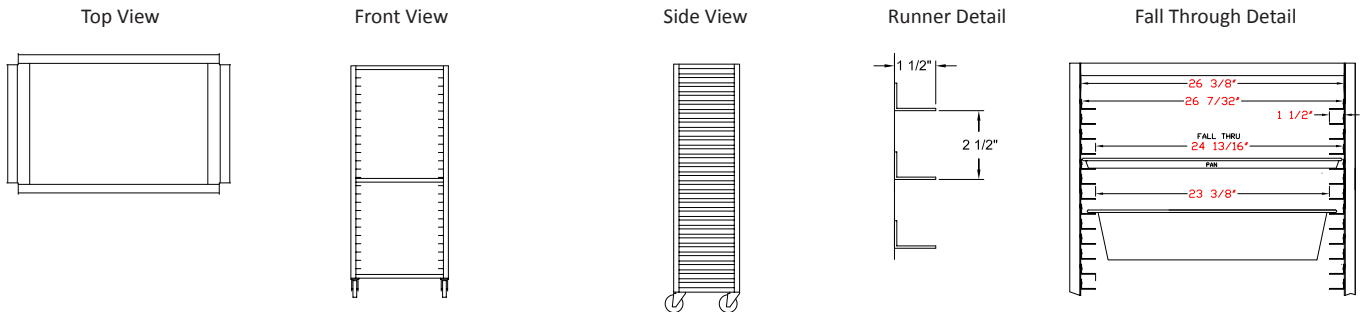

Lockwood Model No.	Angles	Center Spacing	Pan			Exterior Dimensions			Weight	
			Capacity	Size		Width	Depth	Height		
RA70-ER24ESL	48	2 1/2"	24	18" x 26"	IN	29 3/8	18 1/2	69 3/4	LBS	38
					CM	74.63	46.99	177.17	KG	17.24
RA70-ER20ESL	40	3"	20	18" x 26"	IN	29 3/8	18 1/2	69 3/4	LBS	35
					CM	74.63	46.99	177.17	KG	15.88
RA70-ER12ESL	24	5"	12	18" x 26"	IN	29 3/8	18 1/2	69 3/4	LBS	29
					CM	74.63	46.99	177.17	KG	13.15
RA64-ER22ESL	44	2 1/2"	22	18" x 26"	IN	29 3/8	18 1/2	63 3/4	LBS	35
					CM	74.63	46.99	161.93	KG	15.88
RA64-ER18ESL	36	3"	18	18" x 26"	IN	29 3/8	18 1/2	63 3/4	LBS	33
					CM	74.63	46.99	161.93	KG	14.97
RA64-ER11ESL	22	5"	11	18" x 26"	IN	29 3/8	18 1/2	63 3/4	LBS	28
					CM	74.63	46.99	161.93	KG	12.70

Rack Specifications:

- Uprights: 1/8" x 1 1/2" x 1 1/2" aluminum angle
- Spacer Bars: .083" x 1 1/8" aluminum tube with steel thread insert
- Casters: (4) 5" x 1 1/8" High Tech gray non-marking threaded stem casters; load capacity 135 lbs each (61.23 kg); temp. range -45 ° / +180° F

Pan Support Specifications:

- 1" x 1 1/2" x .080" Extruded aluminum
- Riveted to uprights

Lockwood reserves the right to change materials and specifications without notice.