




## RA36-ER5E-SOM and RA70-ER10E-SOM SERIES

Aluminum Tray Retrieval Racks

### Features:

- Riveted 3" wide tray supports for extra strength
- Aluminum base & top with sound deadening material
- Ships knocked down via truck line for freight savings
- RA36 Series tray supports on 5" centers
- RA70 Series tray supports on 6" centers




Manufacturing Material and Food Handling Equipment



## RA36-ER5E-SOM and RA70-ER10E-SOM SERIES

### Aluminum Tray Retrieval Rack

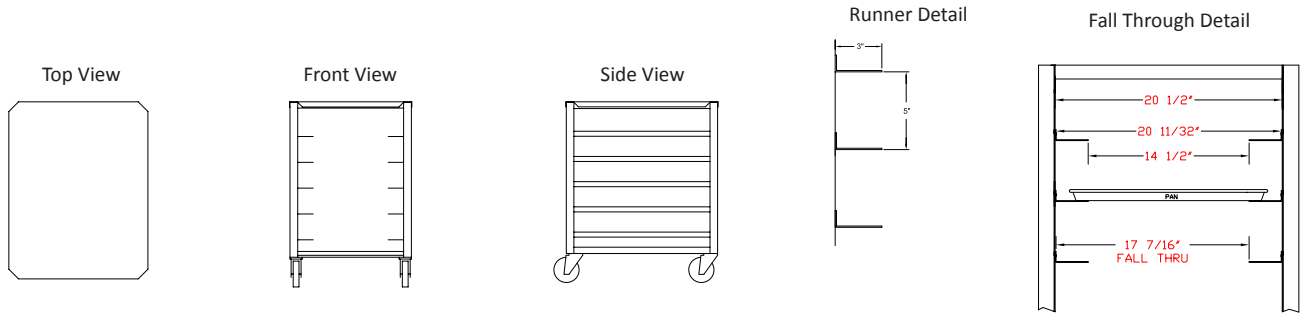

Lockwood Model No.	Pan				Exterior Dimensions			Inside Dimensions			Weight	
	Angles	Capacity	Size		Width	Depth	Height	Width	Depth	Height		
RA36-ER5E-SOM	5 pair	10	15" x 20"	IN	23 13/16	30 5/16	35 3/4	20 1/2	30 5/16	27 5/8	LBS	41
				CM	60.48	76.99	90.81	52.07	76.99	70.18	KG	18.60
RA36-ER5E-SOM1	5 pair	10	16" x 22"	IN	25 5/8	32 5/16	35 3/4	22 5/16	32 5/16	27 5/8	LBS	44
				CM	65.10	82.07	90.81	56.67	82.07	70.18	KG	19.96
RA36-ER5E-SOM2	5 pair	10	14" x 18"	IN	21 5/8	30 5/16	35 3/4	18 5/16	30 5/16	27 5/8	LBS	40
				CM	54.94	76.99	90.81	46.51	76.99	70.18	KG	18.14
RA36-ER5E-SOM4	5 pair	10	15 1/2" x 21 1/2"	IN	25 1/8	32 5/16	35 3/4	21 13/16	32 5/16	27 5/8	LBS	44
				CM	63.83	82.07	90.81	55.39	82.07	70.18	KG	19.96
RA70-ER10E-SOM	10 pair	20	15" x 20"	IN	23 13/16	30 5/16	69 3/4	20 1/2	30 5/16	61 5/8	LBS	56
				CM	60.48	76.99	177.17	52.07	76.99	156.54	KG	25.40
RA70-ER10E-SOM1	10 pair	20	16" x 22"	IN	25 5/8	32 5/16	69 3/4	22 5/16	32 5/16	61 5/8	LBS	60
				CM	65.10	82.07	177.17	56.66	82.07	156.54	KG	27.22
RA70-ER10E-SOM2	10 pair	20	14" x 18"	IN	21 5/8	30 5/16	69 3/4	18 5/16	30 5/16	61 5/8	LBS	55
				CM	54.94	76.99	177.17	46.51	76.99	156.54	KG	24.95
RA70-ER10E-SOM4	10 pair	20	15 1/2" x 21 1/2"	IN	25 1/8	32 5/16	69 3/4	21 13/16	30 5/16	61 5/8	LBS	60
				CM	63.83	82.07	177.17	55.39	76.99	156.54	KG	27.22

#### **Rack Frame Specifications:**

- Uprights: 1/8" x 1 1/2" x 1 1/2" aluminum angle
- Spacer Bars: .083" x 1 1/8" round aluminum tube with steel thread insert

#### **Pan Support Specifications:**

- 1" x 3" extruded .080" aluminum
- Riveted to uprights

#### **Top & Base Specifications:**

- Top: .090" aluminum; formed construction
- Base: .063 aluminum; formed construction
- Casters: (4) 5" x 1 1/4" anti-static swivel stem casters with precision bearings (2 w/brakes); load capacity 325 lbs each (147.42 kg); temp. range -40 °/ +180° F

***Lockwood reserves the right to change materials and specifications without notice.***