



Item# \_\_\_\_\_

Job \_\_\_\_\_



## METRO MOBILE DELIVERY/STORAGE CABINETS

- **Many Uses:** Delivery/storage cabinets can be used to hold food in various stages of preparation or to deliver prepared food to the place it is served.
- **Sturdy:** Top and bottom corners are reinforced with aluminum castings. This feature, plus a stabilizing bar inside, keep cabinets square and rigid.
- **Strong and Lightweight:** Delivery/storage cabinets are made of .063 inch (1.6mm) and .100 inch (2.5mm) aluminum for strength without excess weight.
- **Saves Space:** When opened, the continuous hinged door fits into a protective recess along the side wall so cabinets can be placed flush against one another to save space.
- **Easy to Open and Close:** The door can be opened or closed easily by either right or left-handed operators. Dual purpose gravity "slam" latch holds door closed securely or completely opened.
- **Designed for Easy Cleaning:** Unitized extruded aluminum slide panels and smooth, obstruction-free chassis permit thorough cleaning. Unique integral hinge design stays clean and sanitary.
- **Four Sizes:** Cabinets come in sizes from 35<sup>3</sup>/<sub>4</sub>" to 71<sup>3</sup>/<sub>4</sub>" (908 x 1822mm) high to meet every need. Extruded aluminum slide panels hold 18" x 26" (455 x 660mm) sheet pans on 1<sup>1</sup>/<sub>2</sub>" (38mm) centers.
- **Lockable Door**



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com



Copyright © 2000 InterMetro Industries Corp.



# METRO MOBILE DELIVERY/STORAGE CABINETS

## SPECIFICATIONS:

- **Material:** .063" (1.6mm) and .100" (2.5mm) high strength aluminum alloy and aluminum alloy extrusions.
- **Top:** .063" (1.6mm) aluminum formed into box section, reinforced with cast aluminum corners.
- **Bottom:** .100" (2.5mm) aluminum formed into box section, reinforced with cast aluminum corners. Provides clean, smooth, obstruction-free floor.
- **Sides:** All extruded aluminum including bulb-tipped tray slides on 1 1/2" (38mm) centers.
- **Back:** .063" (1.6mm) aluminum brake-formed from flat stock to interlock with rear corner posts.
- **Door:** .100" (2.5mm) aluminum reinforced with extruded door pull; extruded door hinge; door swings 270 degrees and recedes into side wall with door stay; dual purpose gravity "slam" latch holds door closed or fully opened.
- **Casters:** Two B5DN on back — 5" (127mm) double ball bearing swivel, ball bearing axle, nickel-plated, donut neoprene-tired, pre-lubricated, bolted through separate full-length angle-formed 1/8" (3.2mm) thick aluminum plates to bottom of chassis. Two B5DNB on front — same as above, with wheel brake.

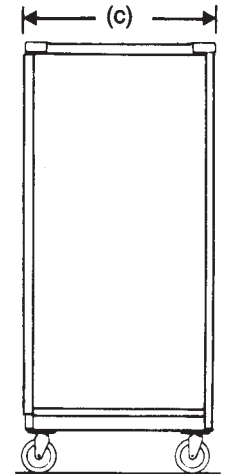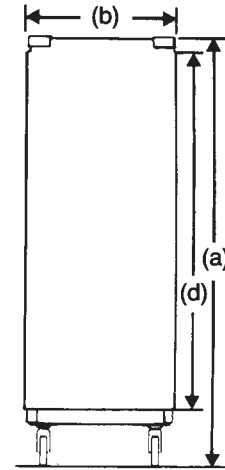

## DIMENSIONS:

Model No.	(a) Height		(b) Width		(c) Depth		(d) Inside Height		Slide Spacing		Pan Capacity Size			Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	No.	(in.)	(mm)	(lbs.)	(kg)
DSC6N	59 3/4	1517	22 3/8	568	28 3/8	720	48 3/4	1238	1 1/2	38	32	18 x 26	445 x 660	98	44
DSC7N	71 3/4	1822	22 3/8	568	28 3/8	720	60 3/4	1543	1 1/2	38	40	18 x 26	445 x 660	108	49

## ACCESSORY

Model	
A71	Floor Lock

Manufactured by:



**InterMetro Industries Corporation**  
 North Washington Street, Wilkes-Barre, PA 18705  
 Phone: 570-825-2741 • Fax: 570-825-2852  
 For Product Information Call: 1-800-433-2232  
 Visit Our Web Site: [www.metro.com](http://www.metro.com)

L02-064  
 Rev. 12/00 BJ  
 Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

