RV2P-36[®]



a COOL business



Glass Door Coolers

CABINET CONSTRUCTION

• High-density, CFC-Free, polyurethane insulation

- Large low-E double pane tempered thermal glass door
- Self closing door
- Recessed pocket handle
- Exterior: Galvanized metal cabinet
- with powder coated painted surface

Interior: Easy to clean pre painted steel

REFRIGERATION

- · Maintenance free condenser
- Automatic self defrost cycle

Hot gas heated drain pan for condensate evaporation

- Electronic temp control
- · Easy to reach components for repairs

SHELVING

Adjustable shelves

OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 85° F and humidity does not exceed 55%

Areas with direct sunlight should also be avoided

LIGHTING

Vertical fluorescent lighting

OPTIONS

- 6" legs
- Heavy Duty Casters
- · Custom graphics
- · Various cabinet colors


WARRANTY

- 1 years parts and labor
- 5 years compressor part

NEMA

Required NEMA
configuration: 5-15R

Dimensions	Shelves	HP	Voltage	Amps	Weight
L D H					
47.25 in 32.38 in 78.9 in 1200 mm 822 mm 2004 mm	10	1/3 +	120	9.5	200 lbs
	Net Capacity, cf: 40 (1132.6 L)			Energy Consumption: 6.65 kw-hr /day	

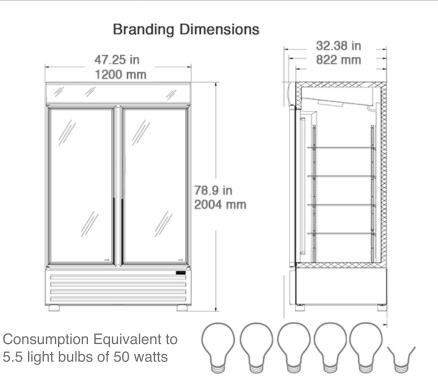





Heavy Duty Casters