



- Ideal for Catering Great for Loading and Unloading into Facility
- Extended Hook to Clear Rear Bumper
- Heavy Duty, Welded Construction Reinforced Underside Tubing for Added Strength
- Lightweight, Durable AluminumWill Not Rust
- Anti-Slip, High Traction Surface
- Folds and Carries Like a Suitcase
 Separates into Two Pieces for Easy Carrying







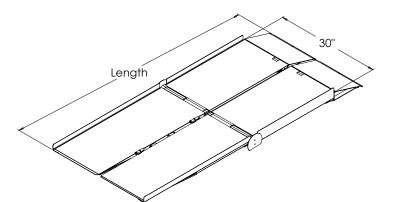





Utility Ramps				
Model Number	Size L x W	Folded Size W x H x L	Weight	Weight Capacity
UTW630	6' x 30''	10¾" x 16" x 38¼"	36	600 lbs.
UTW730	7' x 30''	10¾" x 16" x 44¼"	41	600 lbs.
UTW830	8' x 30''	11" x 16" x 50¾"	52	600 lbs.
UTW1030	10' x 30"	11" x 16" x 62¾"	63	500 lbs.

Maximum Ramp Capacity: 300 lbs - One axle, 600 lbs - Two axles. Except on UTW1030: 250 lbs - One axle, 500 lbs - Two axles.