RM-7-HC

Glass Door Merchandiser with Swing Door



RM-7-HC 03/09/18 Item # 13408

W x D x H 21.25" x 25" x 37.75"

RM-7-HC













RM-7-HC
5.97 ft ³
21.25" x 25"
44.88"
37.75"
2 adjustable, 1 floor shelf
17.75" x 20.75"
18" x 9.25"
155 lbs.
30" x 30" x 42"

Electrical / Refrigeration	One Section RM-7-HC
Voltage	115/60/1
HACR Breaker	15.0 Amps_
Electrical Connection (NEMA)	5-15P 🛈
Voltage Range	104-126
Ambient Temp. Range	60° to 86°F
Control Setpoint Range	34° to 40°F
Amperage	3.2
Energy Consumption (kWh/day) @ASHRAE	1.39
Approx. Nominal Compres. BTU/HR (HP)	582 (1/8HP)
Refrigerant	R290

_					
n	n	н	^	ns	į
	ш	ш	u	нь	ł

☐ Floor Epoxy Shelf (HS-5344) ☐ Epoxy Shelf (HS-5343)

Warranty

* 3 Year - parts and Labor on entire machine. 5 Year - Parts on Compressor Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Item #:			
Project:			
Qty:			
AIA#:			

Features

- Curved vertical corners with silver aluminum exterior provide enhanced product display
- Energy efficient vertical LED interior lights illuminate products on display
- Forced-air evaporator for quick temperature pull-down
- Large glass door are energy efficient low E multi pane glass
- Spring assisted self-closing door with stay open feature
- (3) epoxy coated wire shelves are standard
- Stackable (three units high) to conserve warehouse floor space
- Refrigerant flow is controlled with a capillary tube
- 2 inch leveling legs standard
- · Three years parts and labor warranty
- · Five year compressor warranty
- 8 ft. cord and plug


Capacity:


20 oz. bottles: 102 12 oz. bottles: 217

Hoshizaki reserves the right to change specifications without notice.



FRONT VIEW SIDE VIEW

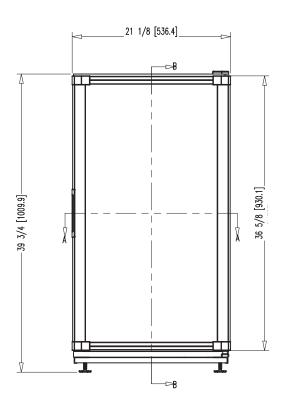

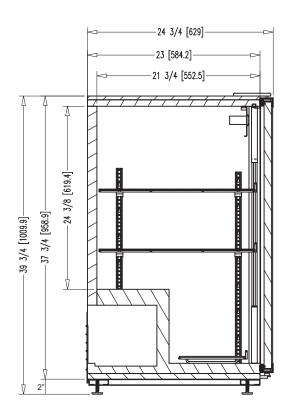

SECTION B-B

PLAN VIEW HEADER DIMS SECTION A-A -20 11/16 [525.4]-– 18 1/8**"** – 18 3/16 [461.9]-**--**2 25/32[™] 1 3/16" RM-7 DECAL HEADER SIGN DIMENSIONS (Area Visible) 23 1/16 [585.9] 13/16 [554.1] 1 9/64" 🍱 24 3/4 [629] 47.88" [1216.2] **Graphic Requirements:** • 360 dpi resolution. Scale 1=1 • Colors for CMYK process • Image with 1/4" of excess by side • Graphics must be saved in photoshop (with layers) - (or your sign company file type requirements) · Include a full color print out Material Requirements: • 3M exterior grade UV resistant vinyl adhesive Note: Texts and important parts of the image should be within the visible area.

Printed in the U.S.A.

Area for Controller

The visible area is illustrated by dotted lines when it applies.