

Ρ	ro	ie	ct:
		_	

Item Number:

Description

Air Cooled, Single Phase

Air Cooled, Three Phase

Quantity:

F231-2X GRAVITY FED TWIN TWIST FLOOR MODEL WITH LARGE CAPACITY

ITEMS Item No.

☐ F231-38I2-2X

F231-309I2-2X



MIX INLET REGULATOR - (REQUIRED) Two required, one per barrel.

2149243-01 2A 3/16"Standard.

□ 2204806 Adjustable.

DESCRIPTION

Stoelting's Gravity Soft Serve Freezer dispenses two single flavors, or combines them in a twin twist. The F231-2X has 66% larger storage capacity than the standard F231. Each hopper can hold up to five gallons of mix.

This freezer is ideal in self-serve and buffet-style restaurants or any location seeking the convenience of less frequent hopper refills.



Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

FEATURES

- Delrin® food grade plastic blades provide guiet operation and superior durability.
- Simplified design for quick assembly after cleaning.
- Adjust the dispense rate to meet your requirements.
- Clear door displays circulating product for merchandising
- Efficient freezing cylinder and auger design delivers a consistent uniform product with small ice crystals and a quick recovery
- Highly efficient auger design gently folds the entire contents of the freezing cylinder, delivering a thick, smooth, and creamy product.
- Self-closing spigot eliminates waste and ensures precise portion control.
- Long-wearing parts offer lower preventative maintenance costs.
- Organized hopper covers have compartments for all parts in the freezing cylinder. The hopper covers help with parts identification and prevent loss of parts.

IntelliTec2™ Control

- Programmable and configurable through multi-line graphics
- Upload firmware and download statistics through a USB connection.
- Performance and error logs provide data to maximize profitability
- Senses product consistency or temperature to customize for a wide variety of mixes
- Standby and sleep modes conserve energy and automatically defrost product, maintaining small ice crystals and delivering a superior mouthfeel

ADA Compliant Handles (Optional)


Flat handles 48" from ground


Approvals	Date

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

F231-2X GRAVITY FED TWIN TWIST FLOOR MODEL WITH LARGE CAPACITY HOPPER

DIMENSIONS (Shown in inches (cm))

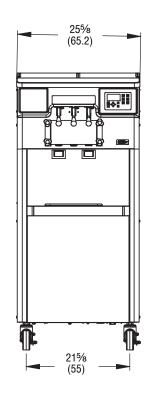

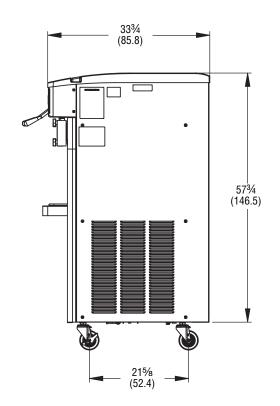

- · Requires a dedicated electrical circuit.
- · Indoor use only.

- Maximum ambient temperature: 100°F (37.8 °C).
- Minimum clearance of 3" (7.6 cm) air space on both sides and open at the top.

GENERAL SPECIFICATIONS

Freezing Cylinder				Hopper				
Capacity gallon (L)	Compressor Btu/hr	Refrigerant	Drive Motor (hp)	Capacity gallon (L)	Compressor Btu/hr	Refrigerant	_	Crated Weight lb (kg)
Two 0.85 (3.22)	12,000	R-404A	Two 3/4	Two 5 (18.9)	1,300	R-134a	640 (290.2)	730 (331.1)

ITEM NUMBER SPECIFICATIONS

Item No.	Cooling	ADA Handles	Volts	Phase	Hz	Plug
F231-38I2-2X	Air	~	208-240	1	60	NEMA 6-20P
F231-309I2-2X	All			3		NEMA L15-20P

