

4184 E. Conant St.
Long Beach, CA 90808
Tel. 310-900-1000
Fax. 310-900-1077
www.turboairinc.com

D · ·	
Project	
FIUIEU	

Model # : Item # :

Available W/H :

Approval :

Roll-In Solid Door Heated Cabinet

Roll-In PRO Series

Qty :

____ FEATURES & BENEFITS ____

Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarm beeps when doors are not sealed.
- Early warning alarm program detects issues before malfunction occurs.
- Digital display allows for easy monitoring.
- Sensitive touch display.
- Ducted fan air distribution system

Maintains temperature within the food zone

On/Off switch

ON/OFF switch is located on control panel

All stainless steel cabinet construction


The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.

Sturdy, clean stainless steel shelving

Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.

- LED interior lighting
- High-density polyurethane insulation The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Full length stainless steel solid doors with locks
- Self-closing doors with stay open feature at 120 degrees
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation
- Lifetime quaranteed heavy duty hinges and handles





* Depth does not include 1-1/4" for door handles. Depth does not include 5-1/2" for ramp.

Model : PRO-50H-RI

Roll-In Solid Door Heated Cabinet

(unit : inch)

Model : PRO-50H-RI

ELECTRICAL DATA		
Voltage	208/115/60/1	
Plug Type	NEMA L14-20P	
Full Load Amperes	15	
Wattage (W)	3000	
Feed Wires with Ground	4	
Cord Length (ft.)	8	
DIMENSIONAL DATA		
# of Doors	2	
# of Racks Accepted	2	
Net Capacity (cu. ft.)	81.8	
Ext. Length Overall (in.)	667/8 (1700mm)	
Ext. Depth Overall (in.)	373/4 (960mm)	
Ext. Height Overall (in.)*	841/4 (2140mm)	
Int. Length Overall (in.)	573/8 (1459mm)	
Int. Depth Overall (in.)	311/2 (800mm)	
Int. Height Overall (in.)	667/8 (1699mm)	
Rack Size (L x D x H) (in.)	27 x 29 x 66	
Net Weight (lbs.)	487	
Gross Weight (lbs.)	514	


Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 1-1/4" for door handles. Depth does not include 5-1/2" for ramp.

WARRANTY : 3 Year Parts and Labor Warranty


STANDARD FEATURES

- Door locks standard
- Solid and sturdy grille design
- Heavy duty stainless steel ramp standard



PLAN VIEW

TOP VIEW

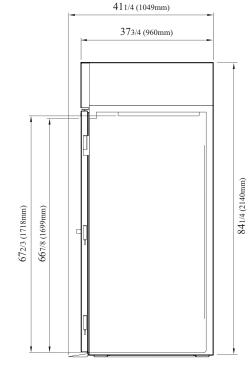

SIDE VIEW

Ver.20191115

Intertek Intertek MADE IN U.S.A

Turbo Air: 800-627-0032
GK: 800-500-3519
Warranty: 800-381-7770
AC: 888-900-1002

Turbo air

(GERMAN)

