

PROJECT:		_
ITEM #	QTY:	_
MODEL #		_
AIA #	_ SIS #	

ROLL-IN PASS-THRU FREEZER

FIS-1D-S1-PT-HC















- 3 Year Parts & Labor Warranty
- Plus An Additional 4 Year Compressor Warranty
- **Exclusive 2 Year Warranty On Magnetic Door Gaskets**
- Lifetime Warranty On Handles & Hinges (parts only)

CABINET CONSTRUCTION

- Stainless Steel Exterior And Interior
- **Heavy-Duty Cam Hinges**
- Stay-Open Door Feature For Easy Product Loading
- Heavy-Duty 20 Gauge Stainless Steel Door
- Heavy-Duty Cylinder Locks
- Steel Interior Door Liner
- Adjustable Door Wiper Gaskets
- One-Piece, Snap-In Magnetic Door Gasket
- Low Profile Vertical Door Handles
- **Hinged Front Shroud**
- Energy Saving Thermal Breaker With Stainless Steel Breaker Caps
- Accepts Cart: 26 1/2"W x 25 1/2"D x 65"H (cart not included)
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control With Touchpoint Interface
- **Expansion Valve Technology**
- One Touch Defrost
- Manager's Lockout Feature
- High Performance, Balanced, Top-Mounted Refrigeration
- Anti-Condensate Perimeter Heater

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All **Environmental Concerns**
- Hot Gas Condensate Evaporator
- Adaptive Defrost For Reduced Energy Consumption And More **Consistent Product Temperatures**
- Epoxy Coated Evaporator Coil, Located Out Of The Food Zone
- Freezer Capable Of Maintaining Product Temperature -10°F



Please verify qualifying units by visiting: www.energystar.gov/cfs

OPTIONS & ACCESSORIES

- Secure-Temp™ Technology
- · Stainless Steel Back
- · Stainless Steel Exterior Floor (base)
- · Exterior Laminate
- · FlexTemp Maintain Between 0°F And 20°F
- · Door Swing Orientation (at time of order)

· Correctional Facilities Option

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168


Sales@VictoryRefrigeration.com	VictoryRefrigeration.con
--------------------------------	--------------------------


Rev. 9/30/21 Printed in U.S.A.


APPROVAL: _____ DATE: ___



FIS-1D-S1-PT-HC

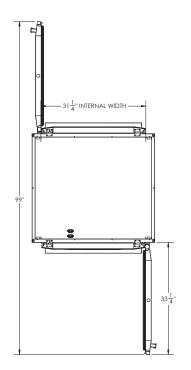

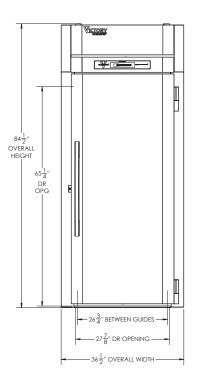

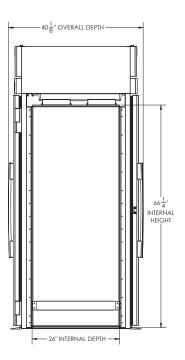

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

Required Clearance: Top 12", Rear 3", Sides 0"

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft)	38.69	Cabinet Voltage	115/60/1	Height	89"
Width, Overall (in.)	36 1/2"	Total Amperes	10.5	Width	45"
Depth, Overall (with Handle)	40 1/8"	NEMA Plug (8' cord)	5-15P	Depth	45"
Height Overall	84 1/2"	REFRIGERATION DATA		Crated Weight	538 lbs
Depth, Door Open 90°	99"	Condensing Unit Size, HP	3/4+		
Door Opening (in.)	27 7/8" x 65 1/4"	Refrigerant	R-290		
No. Of Doors	2	Capacity (BTU/HR) (100°F/20°F)	2580		
		Heat Rejection (BTU/HR)	3870		
		Charge (lbs/grams)	0.2866/130		

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Rev. 9/30/21 Printed in U.S.A.

