VICTORY

PROJECT:		
ITEM #		QTY:
MODEL #		
AIA #	SIS #	

PIZZA PREP TABLE VPP119HC



CABINET CONSTRUCTION

- · Stainless Steel Exterior (galvanized back and bottom)
- Aluminum Interior
- 22 Gauge Stainless Steel Top
- Hinged, Insulated, Flat Lift-Up Lids
- One-Piece, Snap-In Magnetic Door Gaskets
- Heavy-Duty Aluminum Pan Liner
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control
- Field Reversible Doors
- Chrome Lift Off Hinges
- Low Profile Horizontal Door Handles
- Epoxy Coated Shelves (2 per section)
- Stay-Open Door Feature For Easy Product Loading
- Top Accommodates Up To 6" Deep Food Service Pans (pans not included)
- Removable 19" Wide Cutting Board
- 3" Casters Two With Locks
- 3 Year Parts & Labor Warranty Plus An Additional 4 Year Compressor Warranty
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles (parts only)

OPTIONS & ACCESSORIES

- Stainless Steel Interior
 Stainless Steel Back
- Shelf Clips
- Secure-Temp[™] Technology

• Exterior Door Laminate

DoorLocks

Single & Double Overshelf Kit

Tray Slide Kit

· Additional Shelves

• Bun Tray Rack (per door)

REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Side Mounted Refrigeration System For Serviceability
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



- 6" Casters, 6" Legs Or 6" Seismic Legs
- · Compressor On Left (specify at time of order)
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

3779 Champion Blvd, Winston-Salem, NC 27105


ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/20/21 Printed in U.S.A

APPROVAL: _



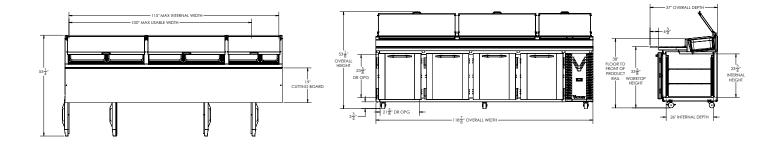

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	42.2	Cabinet Voltage	115/60/1	Height	48″
Width, Overall (in.)	118 7/8″	Total Amperes	7.8	Width	122″
Depth, Overall (with cutting board)	37"	NEMA Plug (8' cord)	5-15P	Depth	40"
Height Overall (with casters)	53 1/8″	REFRIGERATION DATA		Crated Weight	732 lbs
Depth, Door Open 90°	55 1/4″	Condensing Unit Size, HP	1/2	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Door Opening (in.)	21 5/8" x 23 5/8"	Refrigerant*	R-290		
No. Of Doors/Shelves	4/8	Capacity (BTU/HR) (100°F/20°F)	4234		
		Heat Rejection (BTU/HR)	6351	time of order.	
		Charge (lbs/grams)	0.264/120		

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/20/21 Printed in U.S.A.

an Ali Group Company

