# **VICTORY** PIZZA PREP TABLE

PROJECT:		
ITEM #		QTY:
MODEL #		
AIA #	. SIS #	

### PIZZA PREP TAB VPP46HC





#### **CABINET CONSTRUCTION**

- · Stainless Steel Exterior (galvanized back and bottom)
- Aluminum Interior
- 22 Gauge Stainless Steel Top
- Hinged, Insulated, Flat Lift-Up Lids
- One-Piece, Snap-In Magnetic Door Gasket
- Heavy-Duty Aluminum Pan Liner
- 8' Cord And Plug (see electrical data for details)

#### **FEATURES**

- Full Electronic Control
- Chrome Lift Off Hinges
- Low Profile Horizontal Door Handle
- Epoxy Coated Shelves (2 per section)
- Stay-Open Door Feature For Easy Product Loading
- Top Accommodates Up To 6" Deep Food Service Pans (pans not included)
- Removable 19" Wide Cutting Board
- 3" Casters Two With Locks

#### ▶ 3 Year Parts & Labor Warranty

- Plus An Additional 4 Year Compressor Warranty

  Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles (parts only)

#### **OPTIONS & ACCESSORIES**

3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

- Stainless Steel Interior
- Stainless Steel Back

Door Lock

- Secure-Temp<sup>™</sup> Technology
- Exterior Door Laminate
- Tray Slide Kit

Additional Shelves

· Single & Double Overshelf Kit

• Bun Tray Rack (per door)

Shelf Clips


#### REFRIGERATION

- Refrigeration System Uses R-290 Refrigerant To Comply With All Environmental Concerns
- Side Mounted Refrigeration System For Serviceability
- Adaptive Defrost For Reduced Energy Consumption And More Consistent Product Temperatures
- Epoxy Coated Evaporator Coil
- Refrigerator Capable Of Maintaining Product Temperature 36°F To 38°F



- 6" Casters, 6" Legs Or 6" Seismic Legs
- Compressor On Left (specify at time of order)
- Remote Models\* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

## VICTORY PIZZA PREP TABLE VPP46HC

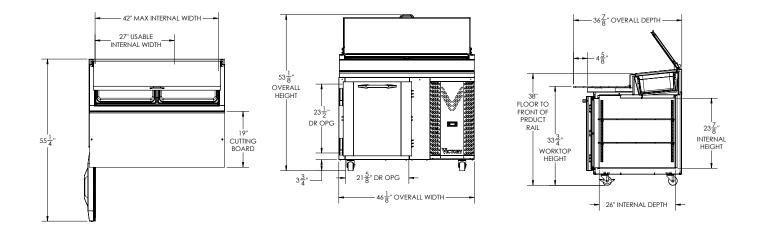

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	12.02	Cabinet Voltage	115/60/1	Height	48″
Width, Overall (in.)	46 1/8"	Total Amperes	4.5	Width	49"
Depth, Overall (with cutting board)	36 7/8"	NEMA Plug (8' cord)	5-15P	Depth	37″
Height Overall (with casters)	53 1/8″	REFRIGERATION DATA		Crated Weight	344 lbs
Depth, Door Open 90°	55 1/4″	Condensing Unit Size, HP	1/2	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Door Opening (in.)	21 5/8" x 23 1/2"	Refrigerant*	R-290		
No. Of Doors/Shelves	1/2	Capacity (BTU/HR) (100°F/20°F)	2940		
		Heat Rejection (BTU/HR)	4410	time of order.	
		Charge (Ibs/grams)	0.231/105		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/15/21 Printed in U.S.A.

an Ali Group Company

