



Outperform every day.™

Project:

Item Number:

Quantity:

Induction Range: Mirage® Pro Countertop

The Vollrath Company, L.L.C.

## INDUCTION RANGE: MIRAGE® PRO COUNTERTOP



Mirage® Pro 59500P Countertop Induction Range

### DESCRIPTION

The ultra-low profile, portable countertop induction range is designed for use in light to medium duty front-of-the-house cooking. Models 59500P and 59510P will plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction ranges are equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off
- Safety auto-shut-off function

### Agency Listings — 59500P



This device complies with Part 18 FCC Rules.

### Agency Listings — 59510P



This device complies with Part 18 FCC Rules.

Due to continued product improvement, please consult [www.vollrath.com](http://www.vollrath.com) for current product specifications.

### MODELS

59500P 1.8kW @ 120V (US only)

59510P 1.4kW @ 120V (US and Canada)

### FEATURES

- Next generation G4 engine with 4 IGBT switches for improved durability and temperature control
- Full two-year parts and labor warranty
- 100 power levels with optimum power output to a wide variety of induction-ready cookware
- 1-100 power levels or °F/°C temperature level controls
- 90% efficiency rating
- Enhanced troubleshooting display
- 1-180 minute timer
- Stainless steel case and ceramic top
- Patent-pending low profile design and complete portability
- 59500P has a variable speed knob for fast temperature adjustment
- Ranges display HOT when unit is turned off, if the cooking surface is still hot
- Rubber feet to prevent slipping of appliance
- Unit comes with cord and plug and does not require hard wiring
- FCC listed

### IMPORTANT

- This appliance is intended for use with induction-ready cookware.
- All models require adequate unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

**WARRANTY:** All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals	Date



Outperform every day.™  
[www.vollrath.com](http://www.vollrath.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or  
920.459.6573



Technical Services: 800.628.0832  
Technical Services Fax:  
920.459.5462

# INDUCTION RANGE: MIRAGE® PRO COUNTERTOP

**MODELS** 59500P 1.8kW @ 120V (US only)  
 59510P 1.4 kW @ 120V (US and Canada)

## DIMENSIONS

Dimensions shown in inches (cm)

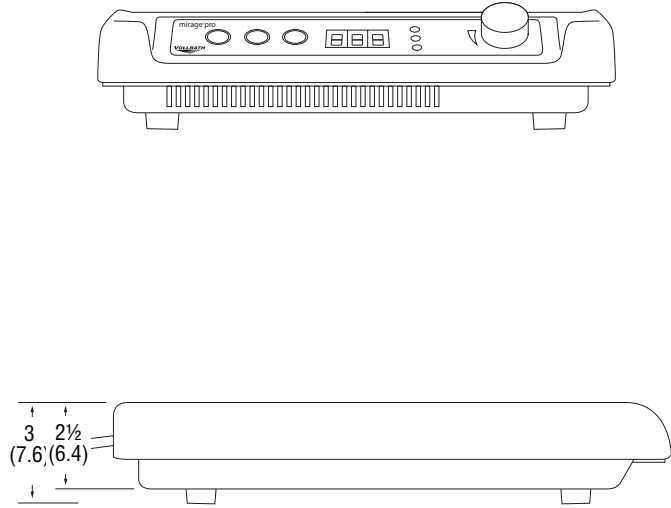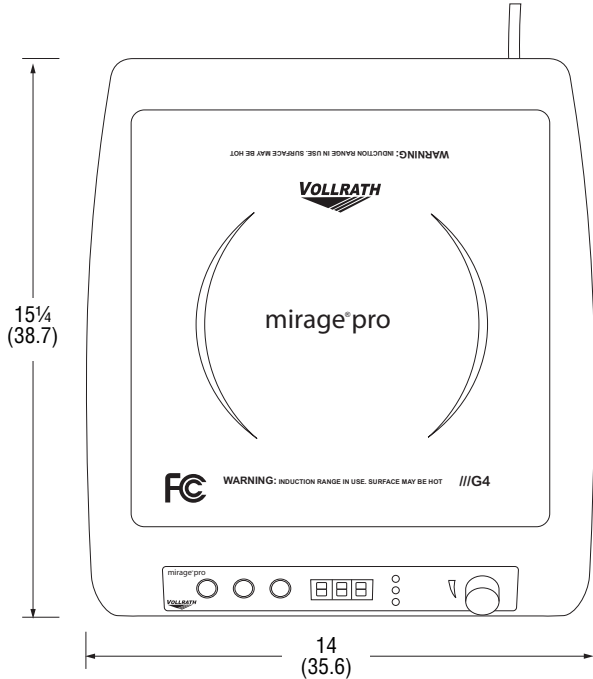


Unit shown with 1/2" (1.27 cm) feet.

## SPECIFICATIONS – 1 PHASE, 60 HZ

Model	Max Pan Size	kW Rating	Volts	Nominal Amps	Plug	Weight	Shipping Weight	Shipping Container
59500P	14 (35.6)	1.8	120V AC	15	NEMA 5-15P	12.8 (5.8)	15.7 (17.1)	17 3/4 x 17 x 7 1/4 (45.1 x 43.2 x 18.4)
59510P	14 (35.6)	1.4	120V AC	12	NEMA 5-15P	12.8 (5.8)	15.7 (17.1)	17 3/4 x 17 x 7 1/4 (45.1 x 43.2 x 18.4)

### Receptacle



Outperform every day.™

www.vollrath.com

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560  
 Main Fax: 800.752.5620 or

Technical Services: 800.628.0832  
 Technical Services Fax:  
 920.459.5462