

Project Name:	
Location:	
Item #:	Qty:
Model:	

69K-903 UNDERCOUNTER ICE MACHINE - SQUARE CUBE

MODEL: 69K-903





69K-903

ELECTRIC -

115V / 60Hz / 1Ph International voltage available 6' (2m) NEMA 5-15P cord set included



3RD PARTY APPROVALS









DOF 2018 Compliant

Zero Ozone Depletion Potential

KRATOS ICE WARRANTY (USA)

One (1) year parts and on-site labor

Contact Central Restaurant Products for warranty statement at www.centralrestaurant.com or 888.908.8051

The Kratos Ice 69K-903 self-contained, air-cooled ice machine is perfect for any freestanding or built-in application. Each unit features a self-contained storage bin and a durable, easy to clean stainless steel and black plastic trim exterior. The easy-touse controls, front-breathing design with vertical evaporator with its proven ice making technology will deliver years of reliable ice production.

FEATURES AND CONSTRUCTION -

- Stainless steel exterior with black plastic trim
- Air cooled compressor
- Programmable, solid state, digital electronic control system.
- Built-in self cleaning mode
- Automatic shut off / overflow protection
- Includes scoop
- Polyethylene storage bin liner for improved sanitation

DAILY ICE PRODUCTION -

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) 69K-903......110 lbs (50 kg)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C)

ICE BIN STORAGE CAPACITY —

OPERATING REQUIREMENTS —

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C) Water Temperature Range 41° to 90°F (5° to 32°C) Water Usage per 100 lbs of ice...... 21 Gallons (79L)

Water Supply Line Connection 3/8" FPT

Water Pressure Range:

Min PSI...... 15 Max PSI80* Min Bar 1.0 Max Bar.....5.5


*Above 80 PSI requires a regulator


Energy Consumption per 100 lbs of ice:


69K-903 11.82 kWh/100 lbs


69K-903 UNDERCOUNTER ICE MACHINE - COCKTAIL CUBE


FRONT VIEW SIDE VIEW

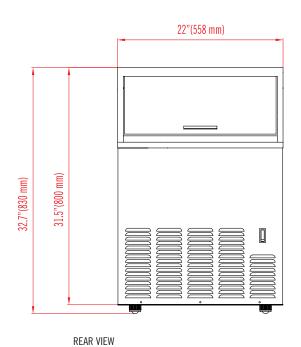


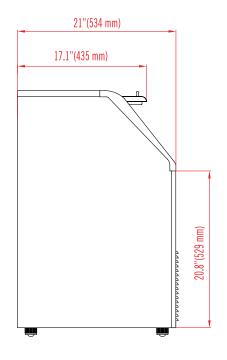

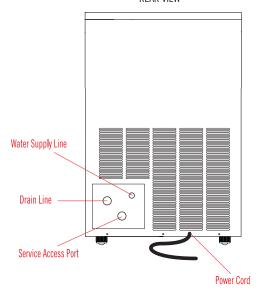







MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE Capacity	NET WEIGHT / Shipping Weight	AMP DRAW (Making / Harvesting)	REFRIGERANT And Charge Size	ELECTRICAL
69K-903	22" x 21" x 32.7" (558 x 534 x 830 mm)	110 lbs (50 kg)	35 lbs (15.9kg)	106 lbs (48 kg) 125 lbs (57 kg)	7.3A / 11.7A	R-134a 9.17oz (260g)	115V / 60Hz / 1Ph

INSTALLATION -

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended