

Commercial Refrigeration Equipment General Specification

WTF—SERIES WORKTOP UNITS

Versatile, compact (29" deep) models with stainless steel work tops and frozen storage of food products. Working height* is 35 1/2".

http://www.Beverage-Air.com

CABINET CONSTRUCTION

Heavy duty construction includes stainless steel on front, sides, door(s) and grille. Worktop is stainless steel with 4" removable backsplash. Cabinet back and bottom are galvanized steel. Interior liner is made of anodized aluminum for longer lasting corrosion protection. Interior thermometer is standard.

Cabinets are insulated with foamed-in-place polyurethane insulation of 2" minimum thickness. Work tops are 2 1/2". Doors are mounted to cabinet on self-closing, cartridge style hinges with 120° stay open feature. Door openings include low wattage, anti-condensate heaters. A plug-in type vinyl magnetic gasket is attached to each door for positive seal. Convenient, contoured, pull handle is made of black anodized aluminum. Interior arrangement includes 2 steel wire epoxy coated shelves behind each door, adjustable in 1/2 inch increments.

REFRIGERATION

Forced air refrigeration systems use capillary tube to meter refrigerant. Temperatures are held at zero and below. Refrigerant used is R404A. Automatic defrost is standard. Automatic (non-electric) condensate evaporator is provided.

ELECTRICAL


Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. 8' long cord and plug set included.

SPECIAL FEATURES

- Cartridge style door hinges provides positive seal & eliminates door sagging issues (excludes glass door and some special units).
- 6" casters, two with brakes standard.
- Optional 6" legs or 3" casters available

*Note: Overall heights of casters may vary with different types of casters depending upon caster manufacturer designations.





29" DEPTH
WORKTOP FREEZER
FOOD PREPARATION SERIES

MODELS: WTF27A WTF48A



WTF27



ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.



Available From:












Model Specified	Store#
Location	Quantity




Standard Worktop Freezer Cabinets Models: WTF27A / WTF48A

Models. Will 27A / Will 40A			
MODEL	WTF27A	WTF48A	
EXTERNAL DIMENSIONAL DATA			
Length Overall (inches) Length Overall (mm)	27" 686	48" 1219	
Depth Overall (inches) - Less handle Depth Overall (mm) - Less handle	29 3/8" 746	30 3/4" 781	
Height Overall— on 6" casters (inches)* Height Overall—on 6" casters (mm)*	35 1/2" 902	35 1/2" 902	
Depth with Door Open 90 °	53 3/4"	52 1/4"	
Clear Door Opening (inches)	22 1/2" x 23 1/4"	19 1/2" x 21 1/2"	
Number of doors	1	2	
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.) NET Capacity (Liters)	7.3 207	13.9 394	
Internal Length Overall (inches) Internal Length Overall (mm)	23" 584	44" 1118	
Internal Depth Overall (inches) Internal Depth Overall (mm)	25" 635	20" 508	
Internal Height Overall (inches) Internal Height Overall (mm)	23" 584	23" 584	
Number of shelves	2	4	
ELECTRICAL DATA			
Full Load Amperes 115/60/1	6.0	7.0	
ENERGY CONSUMPTION (KWH)	7.5	10.9	
REFRIGERATION DATA			
Horsepower	1/4	1/3	
WEIGHT DATA			
Gross Weight (Crated lbs)	160	250	
Gross Weight (Crated kg)	73	114	


PLAN VIEWS

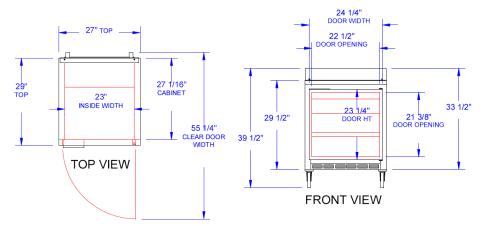

WTF27A



*Note: Overall heights of casters may vary with different types of casters depending upon caster manufacturer designations.

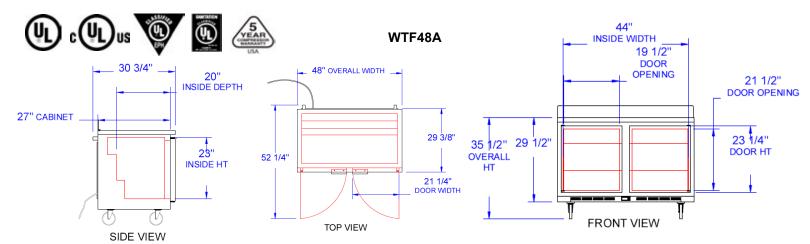

BEVERAGE-AIR® CORPORATION