# **BEVERAGE-AIR**

## HORIZON TOP MOUNT REACH-IN HF2HC Solid Double Door Reach-In Freezer

## Hydrocarbon Series

 Project:
 \_\_\_\_\_\_

 Item:
 \_\_\_\_\_\_\_

 Location:
 \_\_\_\_\_\_\_

 Approved:
 SIS#

### MODEL:

HF2HC-1S



#### **OPTIONS & ACCESSORIES**

- Tray slide pair, 1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (A)
- Stainless steel universal tray slide pair,1 tray slide set for (1) 18" x 26" or (2) 14" x 18" pans (AC)
- Tray slide kit #4 (19 sets per half section)
- Additional epoxy shelves
- Shelf clips
- Stainless steel breaker
- 6" Legs seismic/flanged
- 3" Casters
- Remote option\* (see note on back page)

#### 3 Year Parts / Labor Warranty Additional 4 Year Compressor Warranty

#### CABINET CONSTRUCTION

- Exterior is stainless steel front and continuous coil coated sides
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Expansion valve technology
- One piece grille
- LED interior light
- Self-closing door with 120° stay-open feature, on cam-lift hinges
- Field reversible doors
- Door locks
- Snap-in magnetic gaskets for positive door seal
- Six (6) heavy-duty epoxy coated wire shelves
- 6" Heavy-duty casters, two (2) with brakes
- 8' Cord and plug (see electrical data for details)

#### FINISH OPTIONS

- HF Standard
- (S/S front, continuous coil coated sides, aluminum interior)
- HFP (S/S front, S/S sides, aluminum interior)
- HFS
  - (S/S front, continuous coil coated sides, S/S interior)
- HFPS (Complete S/S exterior & interior)

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Hot gas condensate evaporator
- Adaptive defrost
- Epoxy coated evaporator coil
- $\bullet\,$  Freezer capable of maintaining product temperature down to -10°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL                        | HF2HC-1S          |
|------------------------------|-------------------|
| EXTERNAL DIMENSIONAL DATA    |                   |
| Width Overall                | 52"               |
| Depth Overall with Handle    | 33 7⁄8"           |
| Height Overall with Casters  | 85"               |
| Number of Doors              | 2                 |
| Depth with Door Open 90°     | 55 ½"             |
| Door Opening (in)            | 21 ⁵⁄s" x 61 ⁵⁄s" |
| INTERNAL DIMENSIONAL DATA    |                   |
| NET Capacity (cubic ft.)     | 45.2              |
| Internal Width Overall (in)  | 48"               |
| Internal Depth Overall (in)  | 25 7⁄8"           |
| Internal Height Overall (in) | 62"               |
| Number of Shelves            | 6                 |
| ELECTRICAL DATA              |                   |
| Full Load Amperes 115/60/1   | 10.0              |
| REFRIGERATION DATA           |                   |
| Horsepower                   | 3/4+              |
| Capacity (BTU/Hr)            | 2580              |
| Heat Rejection (BTU/Hr)      | 3870              |
| Charge (lbs/grams)           | 0.2535/115        |
| SHIPPING DATA                |                   |
| Gross Weight                 | 512 lbs           |
| Height - Crated              | 88"               |
| Width - Crated               | 55"               |
| Depth - Crated               | 36"               |

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

#### Top Mount Reach-In Freezer Model: HF2HC-1S

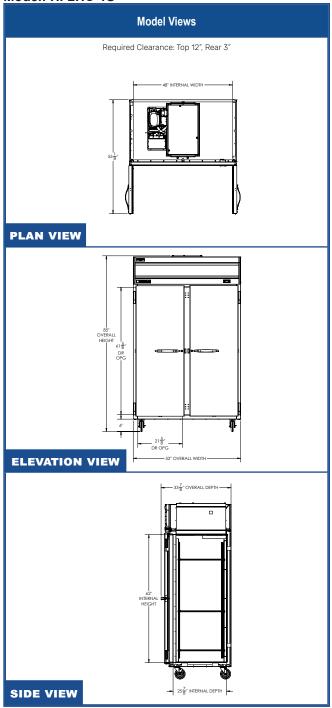

#### **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord and plug set.



an Ali Group Compan

