FOOD PREPARATION TABLES

Hydrocarbon Series

BEVERAGE-AIR

Cut top

hinges

Full electronic control

 Removable hoods made of matching stainless steel Self-closing doors with 120° stay-open feature, on cartridge style

• Interior liner is made of corrosion resistant aluminum

3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty**

CABINET CONSTRUCTION Stainless steel front, sides, top, doors and grille (galvanized back &

- Easy door removal for service and cleaning
- Field-reversible doors (hinge kit not included)
- Snap-in magnetic gaskets for positive door seal
- Painted aluminum door handles
- 6" Casters, with (2) brakes standard
- 17" Wide cutting board constructed of white polyethylene plastic
- Cutting board removable for cleaning
- Four (4) epoxy-coated steel wire shelves
- Twelve (12) 1/6 4" deep pans constructed of polycarbonate plastic

OPTIONS & ACCESSORIES

- · Stainless steel back
- · Stainless steel interior
- Door locks
- Overshelves (single or double)
- Crumb catcher kit
- · Richlite cutting board
- Night cover
- Epoxy coated shelves
- Shelf clips
- Shelf dividers
- Bottle organizer
- Bun rack
- Pan supports
- Pan support crossbar
- Pan configuration
- 6" Legs or 3" casters
- Low profile casters
- Remote option* (see note on back page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperatures between 36° 38°F






3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	SPE60HC-12C
EXTERNAL DIMENSIONAL DATA	
Width Overall	60"
Depth Overall	38 ¾"
Height Overall with Casters	45"
No. of Doors	2
Depth with Door Open 90°	55 ½"
Door Openings	22 %" x 21 %"
Width, Cutting Board	10"
INTERNAL DIMENSIONAL DATA	
NET Capacity (cubic ft.)	16.02
Internal Width Overall (in)	56"
Internal Depth Overall (in)	15 ¾"
Internal Height Usable (in)	17 ¾"
No. of Shelves	4
No. of Pans	12
ELECTRICAL DATA	
Full Load Amperes	5.4
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)	1549
Heat Rejection (BTU/Hr)	2323.5
Charge (lbs/grams)	0.213/96
SHIPPING DATA	
Gross Weight - Crated	342 lbs
Height - Crated	43"
Width - Crated	62"
Depth - Crated	33"

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

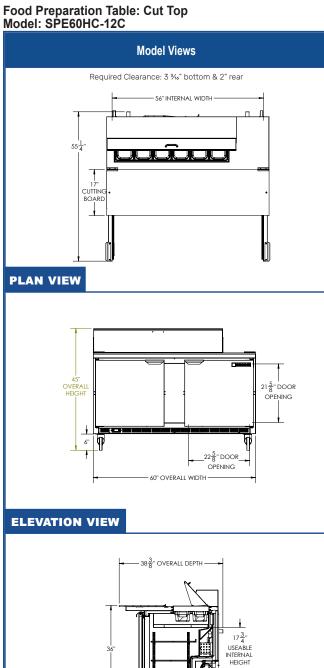





Unit pre-wired at factory and include 8' long cord and plug set.



NEMA 5-15P

SIDE VIEW