

ROYAL SERIES UNDERBAR FOUR COMPARTMENT BAR SINKS

MODEL:	PROJECT:	ITEM #:	QTY:

PRODUCT IMAGE



KR18-64C SHOWN

AVAILABLE IN 1800 or 2100 SERIES

OPTIONAL ACCESSORIES

KR-402 Faucet Install Kit

KR-301 Right End Return (Corner)KR-302 Left End Return (Corner)

KR-310 Right End Splash

KR-311 Left End Splash

KR-401 Cap Catcher and Opener

KR-501 Towel Ring

KR-701 Perforated Dump Basket

KR-806 Upgrade: 6" Longer Stainless Steel Legs

RS-"XX" Sound Deadened Single Speedrail ("XX" indicates size)
RD-"XX" Sound Deadened Double Speedrail ("XX" indicates size)

STANDARD FEATURES

Sink Bowl

20 gauge stainless steel. 10" x 14" x 10" deep sink bowl. Furnished with 1" IPS rear corner drain and $7^{-1}/2$ " overflow pipe

Drainboard

20 gauge stainless steel reinforced with welded braces every 6"

Front Apron

20 gauge stainless steel clad over 20 gauge galvanized steel

Sides

20 gauge stainless steel

Backsplash

20 gauge stainless steel

Back and Bottom

20 gauge galvanized steel

Legs

1 5/8" tubular 16 gauge stainless steel with grey plastic bullet foot

Plumbing

Hot/Cold Water: 1/2" IPS

Drain: 1" IPS

Faucet

2 4" OC wall or deck mount faucet with ceramic cartridge valves

Low Lead Compliance

Low Lead Compliant faucets meet

California AB-1953 and Vermont S152 standards




APPROVED BY:



ROYAL SERIES UNDERBAR FOUR COMPARTMENT BAR SINKS

MODEL:	PROJ	ECT:	ITEM #:	QTY:
--------	------	------	---------	------


1800 SERIES

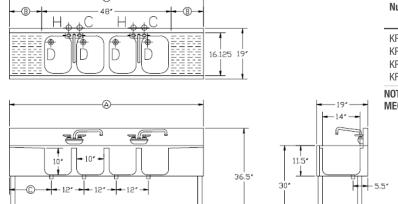

Model Numbers	Overall Length (A)	Drainboard B	Left Side to Drain ©	Bowl Location	Weight (lbs.)
KR18-44C	4'-0"	N/A	4"	Center	115
KR18-64C	6'-0"	12" Each	15"	Center	140
KR18-74C	7'-0"	18" Each	21"	Center	155
KR18-84C	8'-0"	24" Each	27"	Center	190

NOTE: Letter at end of Model Number represents Bowl Location
MECHANICAL REQUIREMENTS: 1/2" IPS Hot and Cold water. 1" IPS drain connection.

2100 SERIES

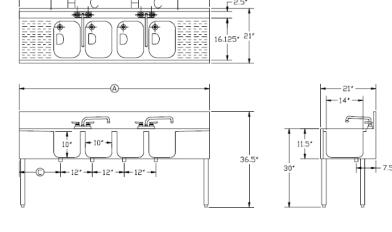

Model Numbers	Overall Length	Drainboard	Left Side to Drain	Bowl Location	Weight (lbs.)	
	(A)	B	©			
KR21-44C	4'-0"	N/A	4"	Center	115	I
KR21-64C	6'-0"	12" Each	15"	Center	140	
KR21-74C	7'-0"	18" Each	21"	Center	155	
KR21-84C	8'-0"	24" Each	27"	Center	190	

NOTE: Letter at end of Model Number represents Bowl Location

MECHANICAL REQUIREMENTS: 1/2" IPS Hot and Cold water. 1" IPS drain connection.



APPROVED BY:

Due to our commitment to continued product improvement, specifications are subject to change without notice.