

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

P-SERIES TOP MOUNTED PASS-THRU REFRIGERATORS

PRD1-1BG Glass Door Pass-Thru

MODELS: PRD1-1BG



PRD1-1BG

OPTIONS & ACCESSORIES

- Stainless steel interior
- Stainless steel shelves
- Glass door locks
- ☐ 3" or 6" Casters
- Pan slides
- Remote option

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- LED lighting standard
- Expansion Valve technology
- Self-closing doors on cam-lift hinges, with 120° hold open feature
- One piece snap-in magnetic door gasket for positive seal
- Stainless steel breakers
- Adjustable 6" legs standard
- Anti-microbial door handles
- Three (3) heavy-duty epoxy coated shelves
- Refrigeration system maintains product temperatures of 36 38°F

REFRIGERATIO N SYSTEM

- Refrigeration system uses R134A
- Automatic, non-electric defrost
- Epoxy coated evaporator coil


















MODEL	PRD1-1BG	
EXTERNAL DIMENSIONAL DATA		
Width Overall	26 1/2"	
Depth Overall with Handle	35 7/8"	
Height Overall	83 3/4"	
Number of Doors	2	
Depth with Door Open 90°	82 1/2"	
Door Opening (in)	21 1/2" x 54 5/8"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.2	
Internal Width Overall (in)	22 1/2"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	56 1/2"	
Number of Shelves	3	
ELECTRICAL DATA		
Full Load Amperes 115/60/1	9.2	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)*	2360	
WEIGHT DATA		
Gross Weight (Crated lbs)	471 lbs	
Height - Crated	87"	
Width - Crated	35"	
Depth - Crated	45"	

P Series - Top Mount Refrigerators

Models: PRD1-1BG

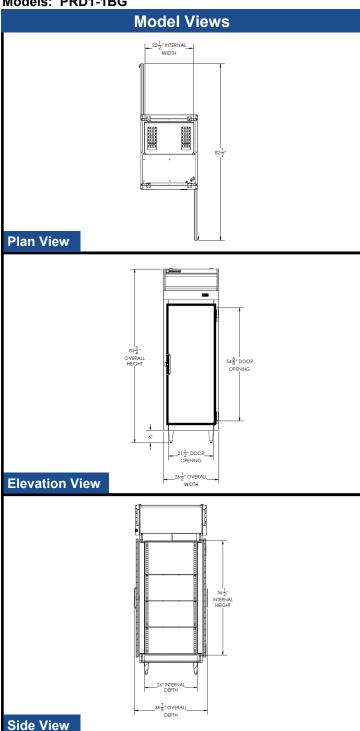

ELECTRICAL CONNECTION



Units pre-wired at factory and include 8' long cord and plug set.













