



Item # _____

Job _____

METRO MOBILE
SIDE LOAD RACKS
Single Section/Model RD Series

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Double-riveted aircraft construction throughout.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Lightweight:** Easy to handle. Freewheeling.
- **Rapid Cooling**
- **Space Saving**
- **Sanitary:** Easy to clean.
- **Ideal** for freezer operations, refrigerator use, bakeries, commissaries.



RD33N



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com

Copyright © 2000 InterMetro Industries Corp.



METRO MOBILE
Side Load Racks RD Series

13.52



METRO MOBILE
SIDE LOAD RACKS
 Single Section/Model RD Series



Specifications

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction throughout.
- **Corner Posts:** 1 1/2" x 1 1/2" x 1/8" (38 x 38 x 3.1mm) angle-shape.
- **Top & Bottom:** 1 1/2" x 1 1/2" x 1/8" (38 x 38 x 3.1mm) angle-shape riveted to four corner posts.
- **Casters:** Two A5L on back—5" (127mm) ball bearing swivel, self-lubricating axle, rubber-wheeled, zinc-plated, bolted to full-length 14-gauge channel to bottom frame. Two A5LB on front—same as above with wheel brake.
- **Slides:** .060" x 1 1/4" x 1 1/2" bulb-tipped angle, double-riveted to posts.

NOTE: Racks 60" and higher have two 1/2" diameter stabilizer rods positioned at center.

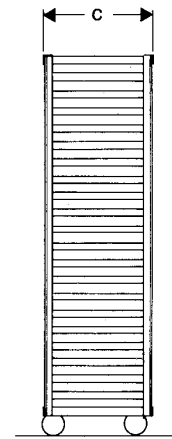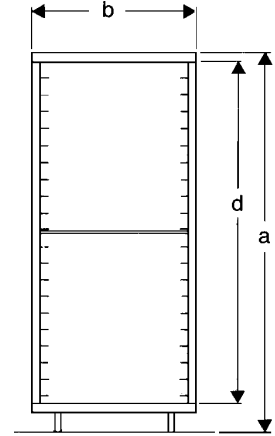

Dimensions

Model No.	(a) Height		(b) Width		(c) Depth		(d) Inside Height		Slide Spacing (in.) (mm)	Pan Capacity no. size (in.)	Approx Pkd Wt.	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)			(lbs.)	(kg)
RD33N	69 1/4	1759	29 3/8	745	18 5/8	470	60 1/2	1535	3 76	20 18 x 26	45	20

Accessories

Model No.	
A33RD	Gray Continuous Bumper
A37	Gray Corner Bumpers
A71	Floor Lock with B5DN/B5DNB Casters Only
A120	Pan Stop

Manufactured by:



InterMetro Industries Corporation
 North Washington Street, Wilkes-Barre, PA 18705
 Phone: 570-825-2741 • Fax: 570-825-2852
 For Product Information Call: 1-800-433-2232
 Visit Our Web Site: www.metro.com

L02-076
 Rev. 2/00
 Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.

