



JOB:  
ITEM:  
QTY:



# ENCLOSED BAKERY DISPLAY CABINET

**APPLICATIONS:** Product Display.

**CONSTRUCTION:** Heavy duty, high tensile, extruded aluminum. Type 6063-T5 alloy.

**UPPER FRAME & TOP:** The upper frame is constructed of vertical uprights 1" x 2 1/2" x 1/8" thick extruded aluminum channels with top cross and side bracing of 1 1/4" x 1 1/4" x .070 wall extruded aluminum tubing, all fully welded together. A solid cap of .063 thick aluminum is welded to uprights and cross bracing.

**TRAY SLIDES:** Slides are 1 1/4" x 1 5/8" x .100" thick extruded aluminum angle with 1 1/4" lip on front end.

**REAR PANEL:** Rear panels is .080 thick aluminum panels with corrugation on each side for strength and enhanced air circulation. Panel is welded to the top, bottom, and rear vertical uprights.

**DOOR:** Custom extruded aluminum frame with polycarbonate insert. The door is supported by three stainless steel hinges designed to provide 270° door swing. A positive gravity catch is provided to retain door in a closed position.

**SIDES:** Covered with 1/8" thick polycarbonate that bolts to aluminum uprights.

**TIE ROD:** A 1" x 1" x .070 wall extruded aluminum tube tie rod is welded to the front vertical upright for extra rigidity.

**BOTTOM FRAME:** Bottom frame is constructed of 1/8" thick aluminum sheet with four sides bent down 1 5/8", all corners welded smoothly. Tubular framework welded inside the 1 3/8" aluminum sheet for extra rigidity. Caster plates (2 3/4" x 4" x 3/8" thick pre-tapped) are welded to bottom of frame.

**CASTERS:** Four platform type 5" casters, full swivel design with sealed ball bearing axle and non-marking wheel.




Model #98063



Phone: 800-255-0104  
Fax: 877-877-7687  
[www.newageindustrial.com](http://www.newageindustrial.com)  
[sales@newageindustrial.com](mailto:sales@newageindustrial.com)

New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.

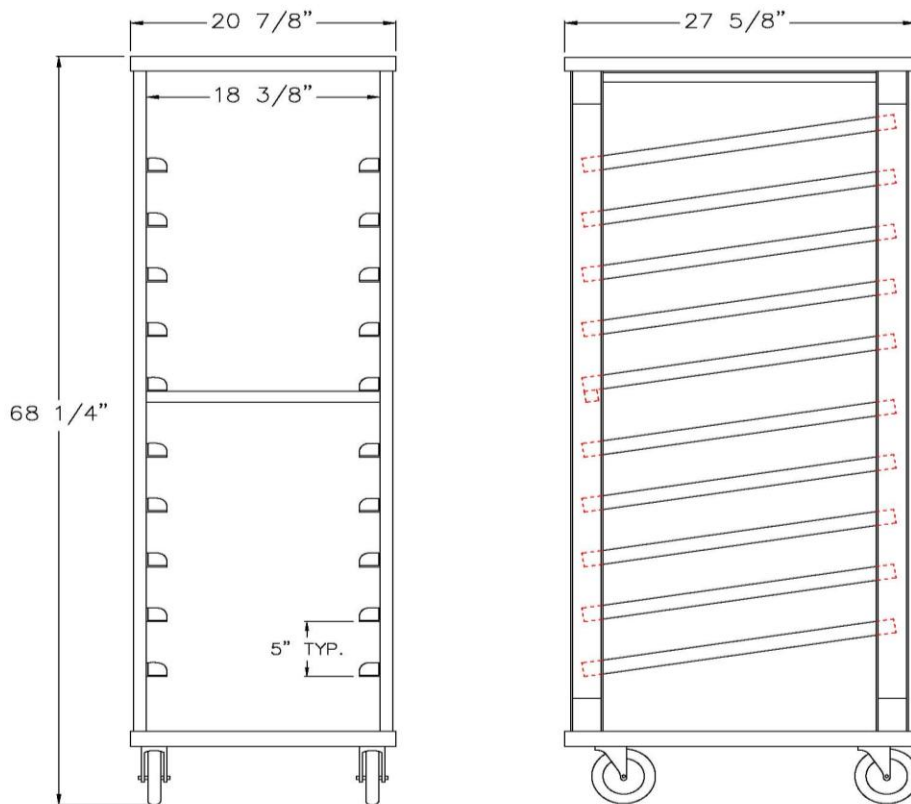

**Model #98063**

Model No.	Size-W	Size-H	Size-D	Runner Spacing	Pan Cap.	Wt.
98063	20 7/8"	68 1/4"	27 5/8"	5" TYP.	11	130#

**Options**

- **CASTER LOCKS-** Add "CL" suffix to model #
- **CORNER BUMPERS-** Add "B" suffix to model #
- **PERIMETER BUMPERS-** Add "PB" suffix to model #



Phone: 800-255-0104  
 Fax: 877-877-7687  
[www.newageindustrial.com](http://www.newageindustrial.com)  
[sales@newageindustrial.com](mailto:sales@newageindustrial.com)

New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.